



CARBIDE - CBN - DIAMOND

Global Support, Global Solutions.

The Solution for
Carbide Tool Manufacturers

CARBIDE BLANKS

Rev. 2


CARBIDE
BLANKS

INTRODUCTION

The Next-Generation Technology To Create Tomorrow's Society




Cemented carbide is the hardest artificial material after CBN and diamond, which is essential as a cutting-tool material to machine automobile parts, a variety of machines, aircraft parts, electric devices, and so on. The demand for carbide cutting tools are not only increasing, but also becoming widely utilized in various fields. Sumitomo Electric started R&D on cemented carbide in 1927, and in the following year, succeeded in developing carbide die for drawing wires and launched the carbide tool business. Ever since, the company have developed new materials(including CBN), various coating grades, and cutting tools of innovative design and functions one after another, helping increase productivity and reduce the machining cost in the machining field. Sumitomo Electric provides not only finished cutting tools but also carbide blanks for tool manufactures, with high quality grades which were developed from our long and abundant experiences. We will strive to exceed our customers' expectations and to contribute to our society.

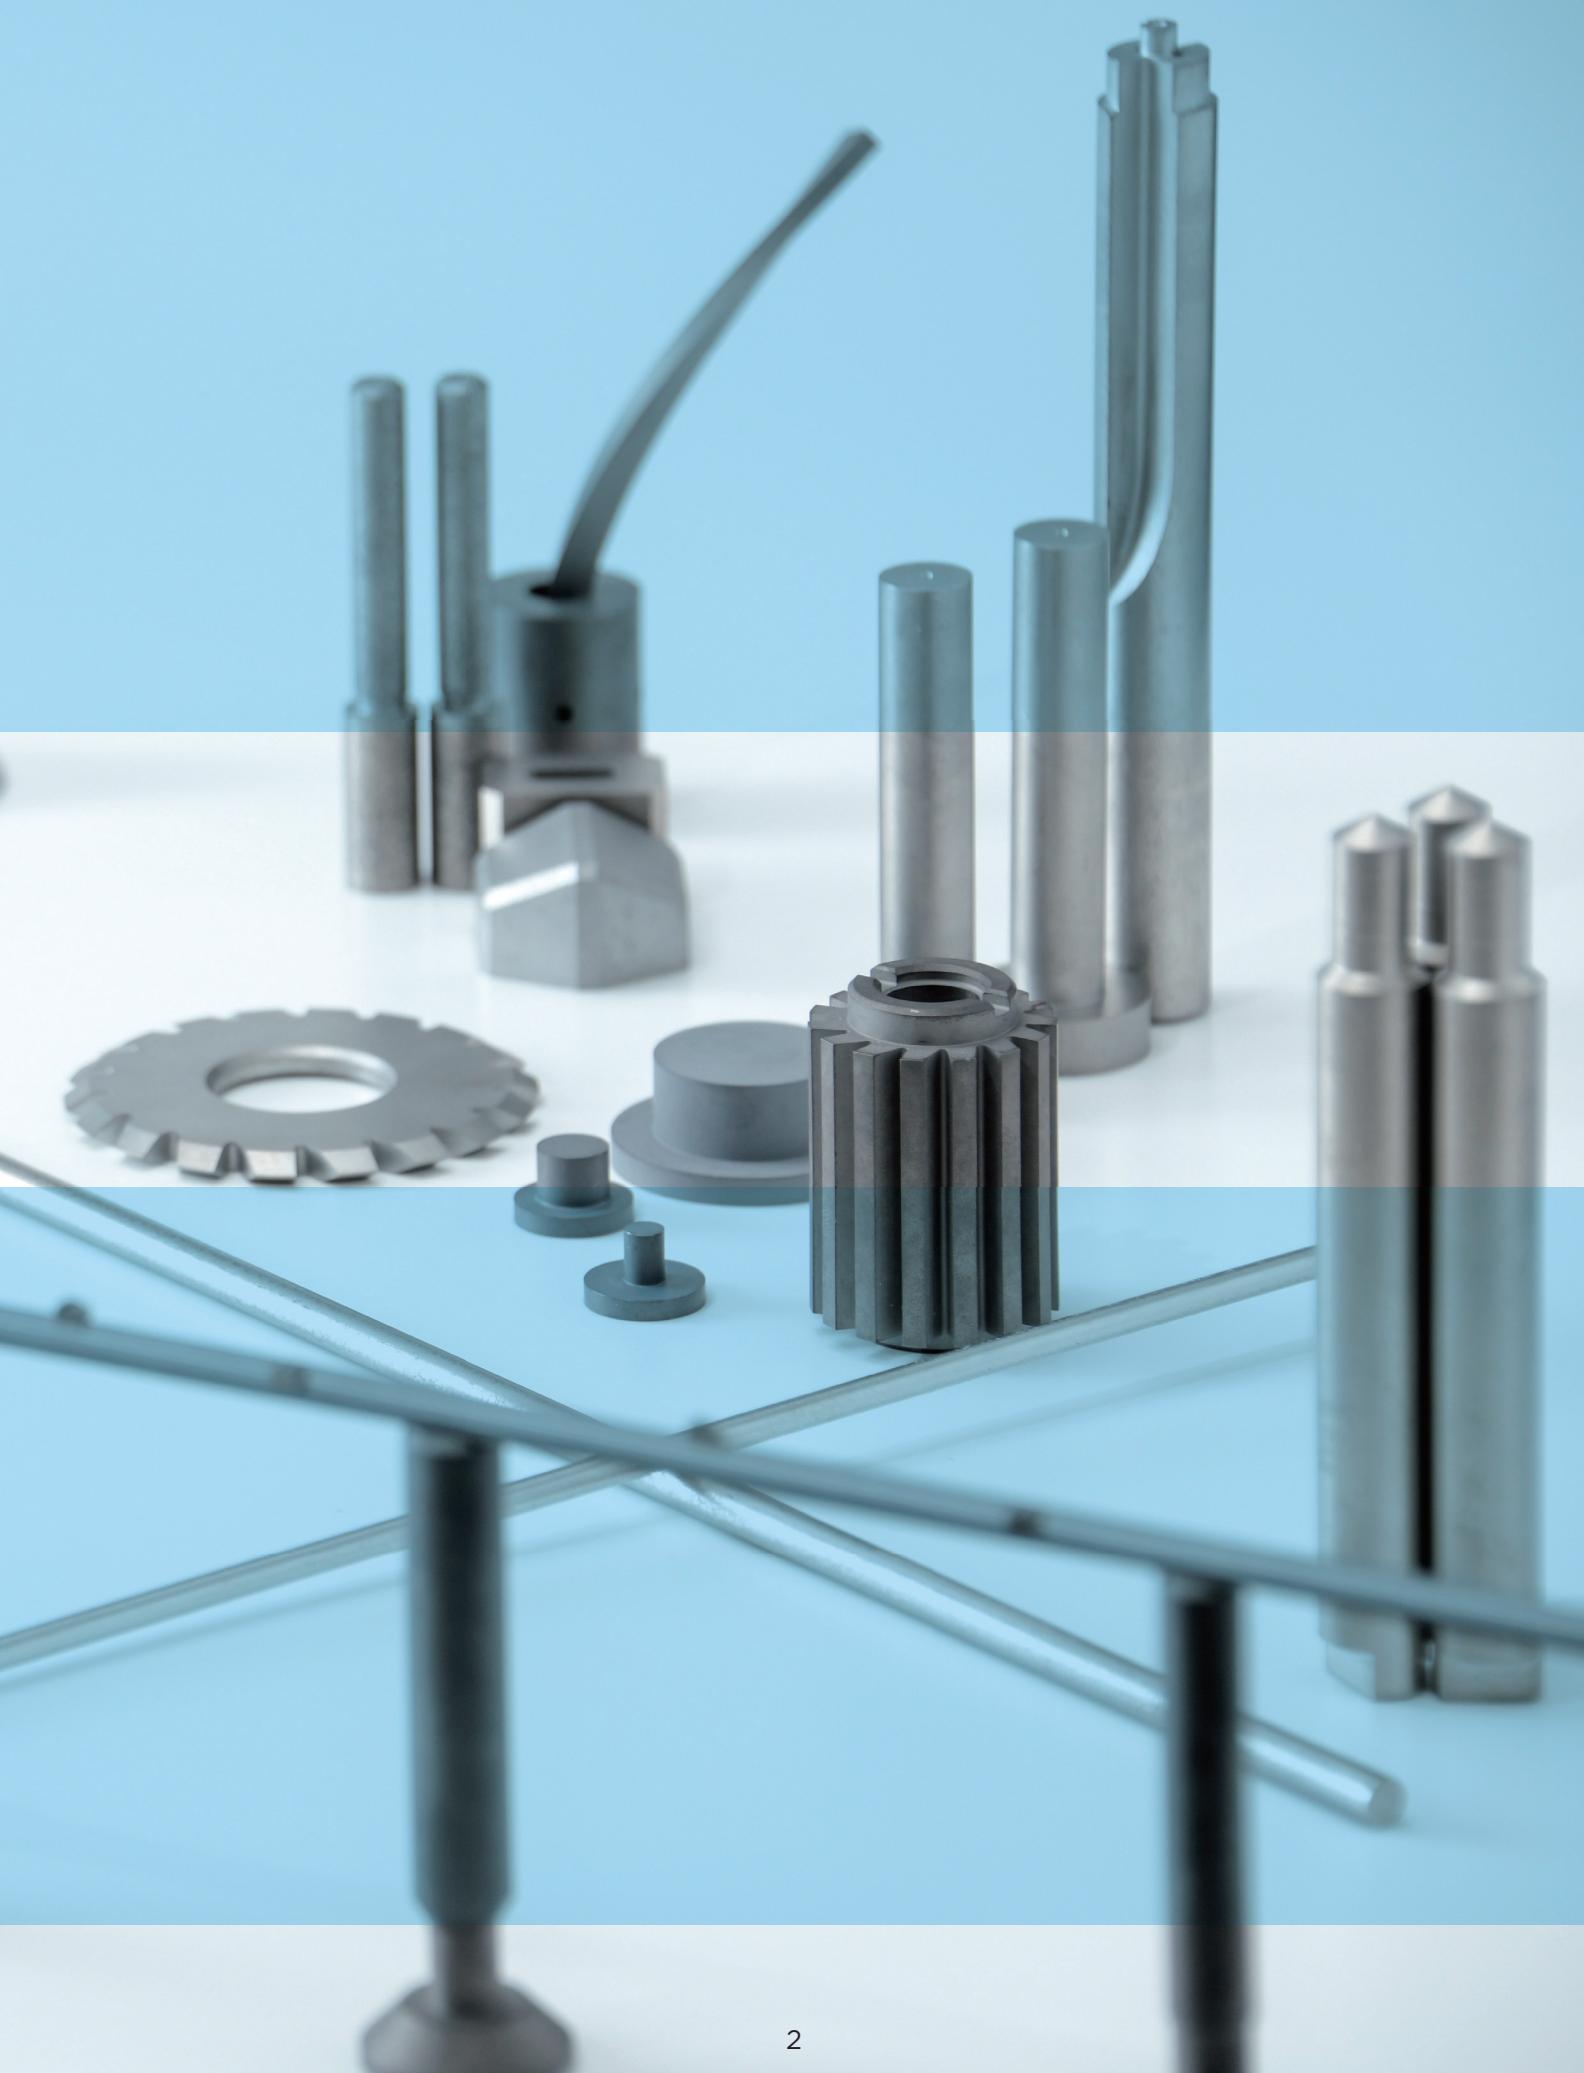

CARBID
BLANK

CONTENTS

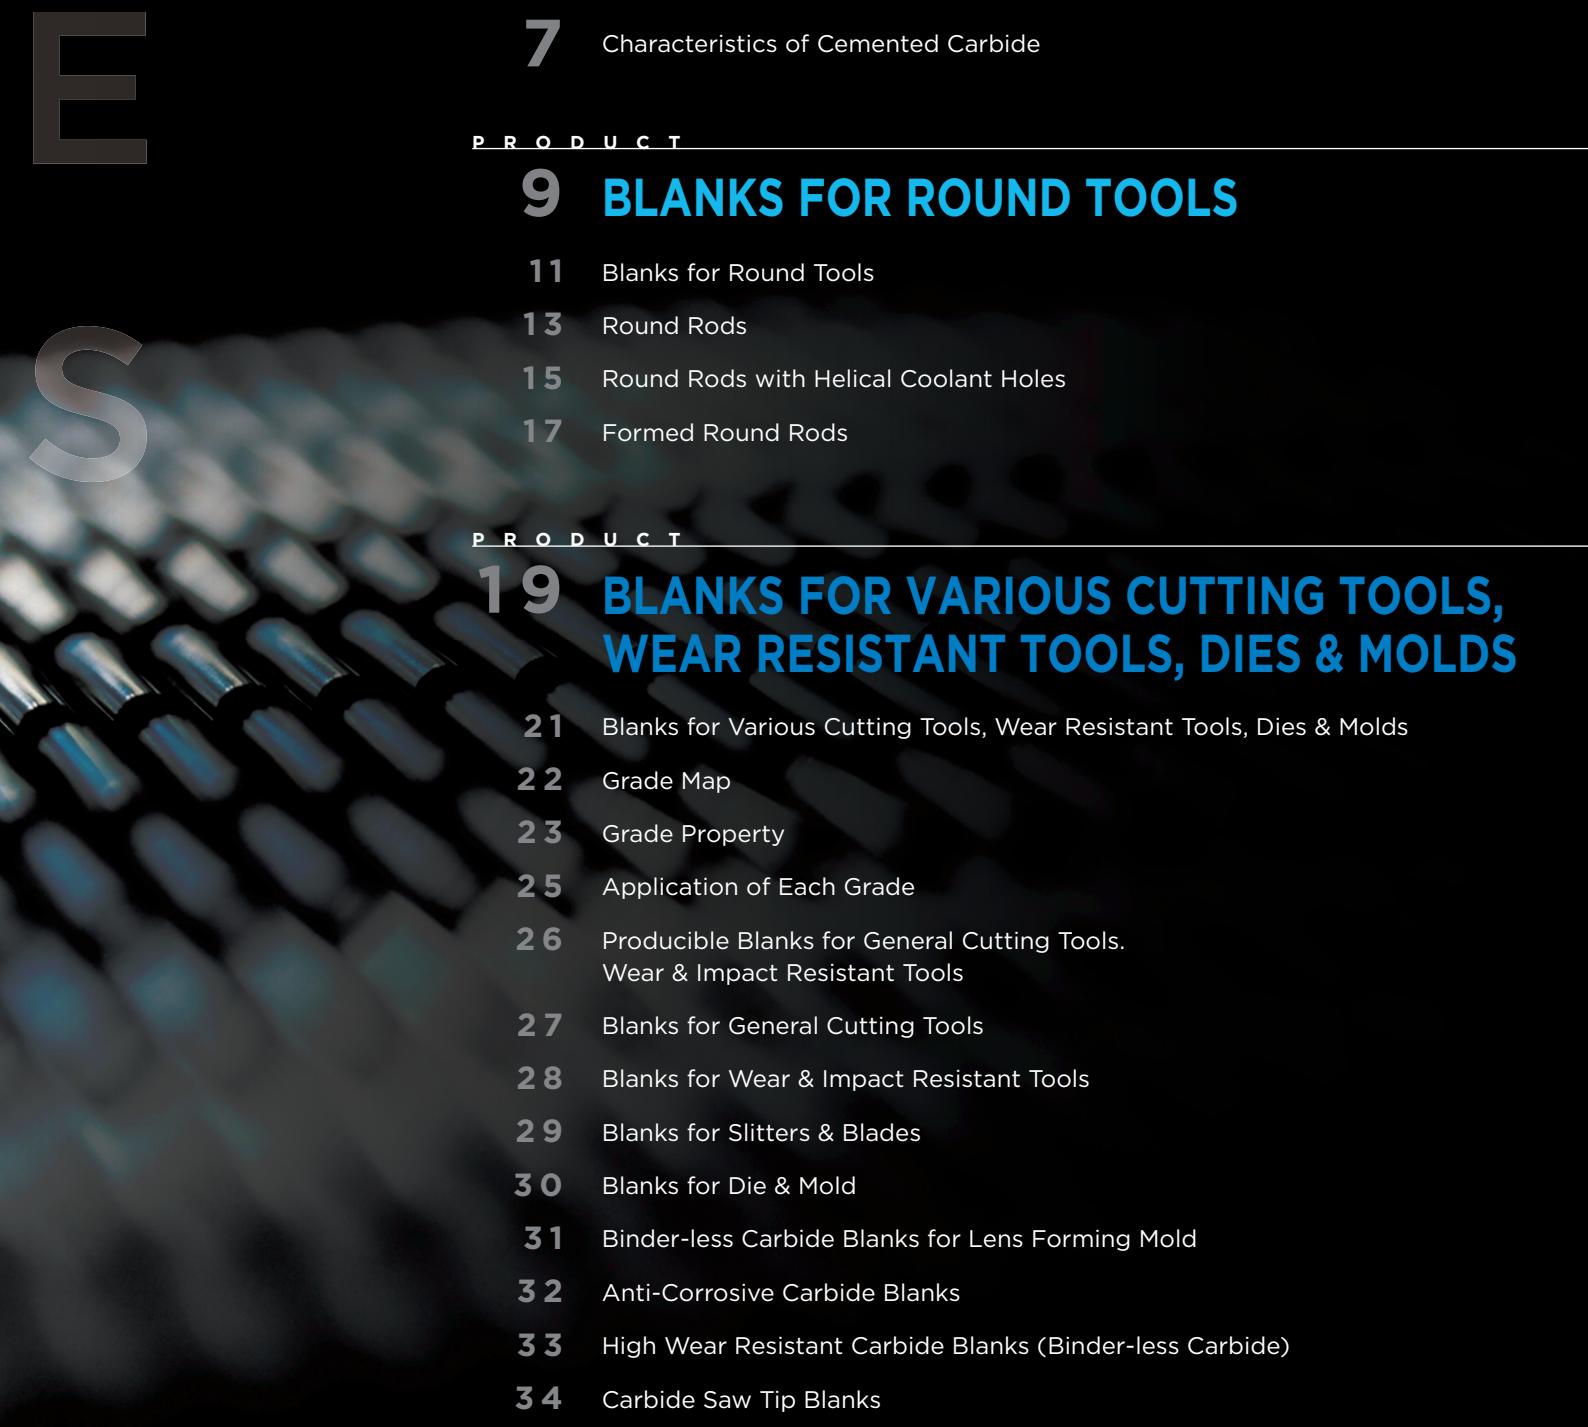- 
- 1** INTRODUCTION
The Next-Generation Technology To Create Tomorrow's Society
 - 5** What Is Cemented Carbide? / Applications of Cemented Carbide
Production Process of Cemented Carbide
 - 7** Characteristics of Cemented Carbide

PRODUCT

9 BLANKS FOR ROUND TOOLS

- 11** Blanks for Round Tools
- 13** Round Rods
- 15** Round Rods with Helical Coolant Holes
- 17** Formed Round Rods

PRODUCT

19 BLANKS FOR VARIOUS CUTTING TOOLS, WEAR RESISTANT TOOLS, DIES & MOLDS

- 21** Blanks for Various Cutting Tools, Wear Resistant Tools, Dies & Molds
- 22** Grade Map
- 23** Grade Property
- 25** Application of Each Grade
- 26** Producible Blanks for General Cutting Tools.
Wear & Impact Resistant Tools
- 27** Blanks for General Cutting Tools
- 28** Blanks for Wear & Impact Resistant Tools
- 29** Blanks for Slitters & Blades
- 30** Blanks for Die & Mold
- 31** Binder-less Carbide Blanks for Lens Forming Mold
- 32** Anti-Corrosive Carbide Blanks
- 33** High Wear Resistant Carbide Blanks (Binder-less Carbide)
- 34** Carbide Saw Tip Blanks
- 35** Property of Saw Tip Carbide
- 36** Description of Saw Tip Blanks
- 37** Available Dimensions for Saw Tip Blanks

What Is Cemented Carbide?

Cemented carbide was invented in Germany in 1923. It is made from mainly WC (the powder combining with tungsten and carbon), and contain molten cobalt as a binder, and also includes TiC (Titanium-carbide) and/or TaC (Tantalum-carbide) as needed. It is an optimal raw material for cutting tool: it has high hardness, high strength at high temperature, so it is used in a high-temperature, high-speed environment thanks to those characteristics.

Cemented Carbide's Micrograph

▼ Typical Cemented Carbide-Phase



Cemented Carbide Characteristic

(comparing WC-Co7% cemented carbide to high-speed steel)


High wear-resistance	← High hardness (Hv:15GPa)	2 times (than high speed steel)
Low elastic deformation	← High Young's modulus (E:620GPa)	3 times
Low plastic deformation	← High compressive strength (σ:5.3GPa)	2 times
Low thermal expansion coefficient	→ Linear expansion coefficient (α:4.9×10 ⁻⁶ de ⁻¹)	1/2 times
High thermal diffusion	← High thermal conductivity (κ:0.19cal/cm·sec·°C)	5 times (than high speed steel)
High thermal transformation resistance	→ High heat resistance	
High corrosion resistance	→ Possible to produce anti-corrosion alloy	

Applications of Cemented Carbide


The above characteristics are utilized in the cutting edges of tools, and die molds. In comparison with common heat-treated steel tools, cemented carbide tools can withstand overwhelming machining speed and have longer tool-life than before, therefore the amount of cemented carbide tools are increasing year on year. Cemented carbide tools are utilized in various different fields, such as manufacturing of car engine, transmission, aircraft engine, generator, construction machine, die mold and other electronic devices.

Production Process of Cemented Carbide


1 Raw Material

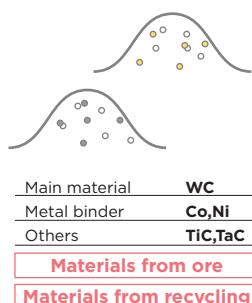


2 Ready-to-press Powder

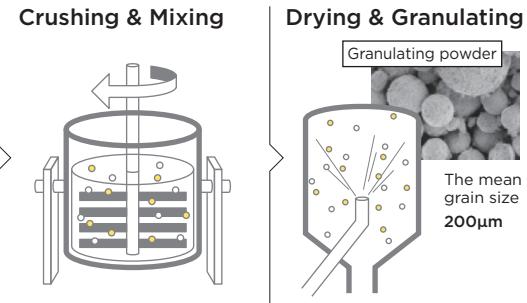


3 Pressing / Extruding

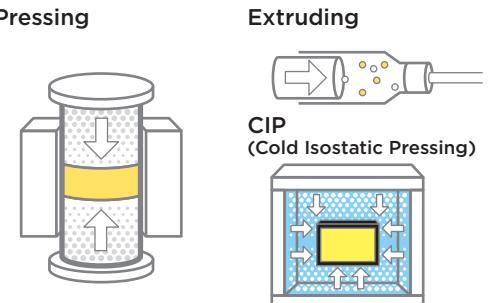

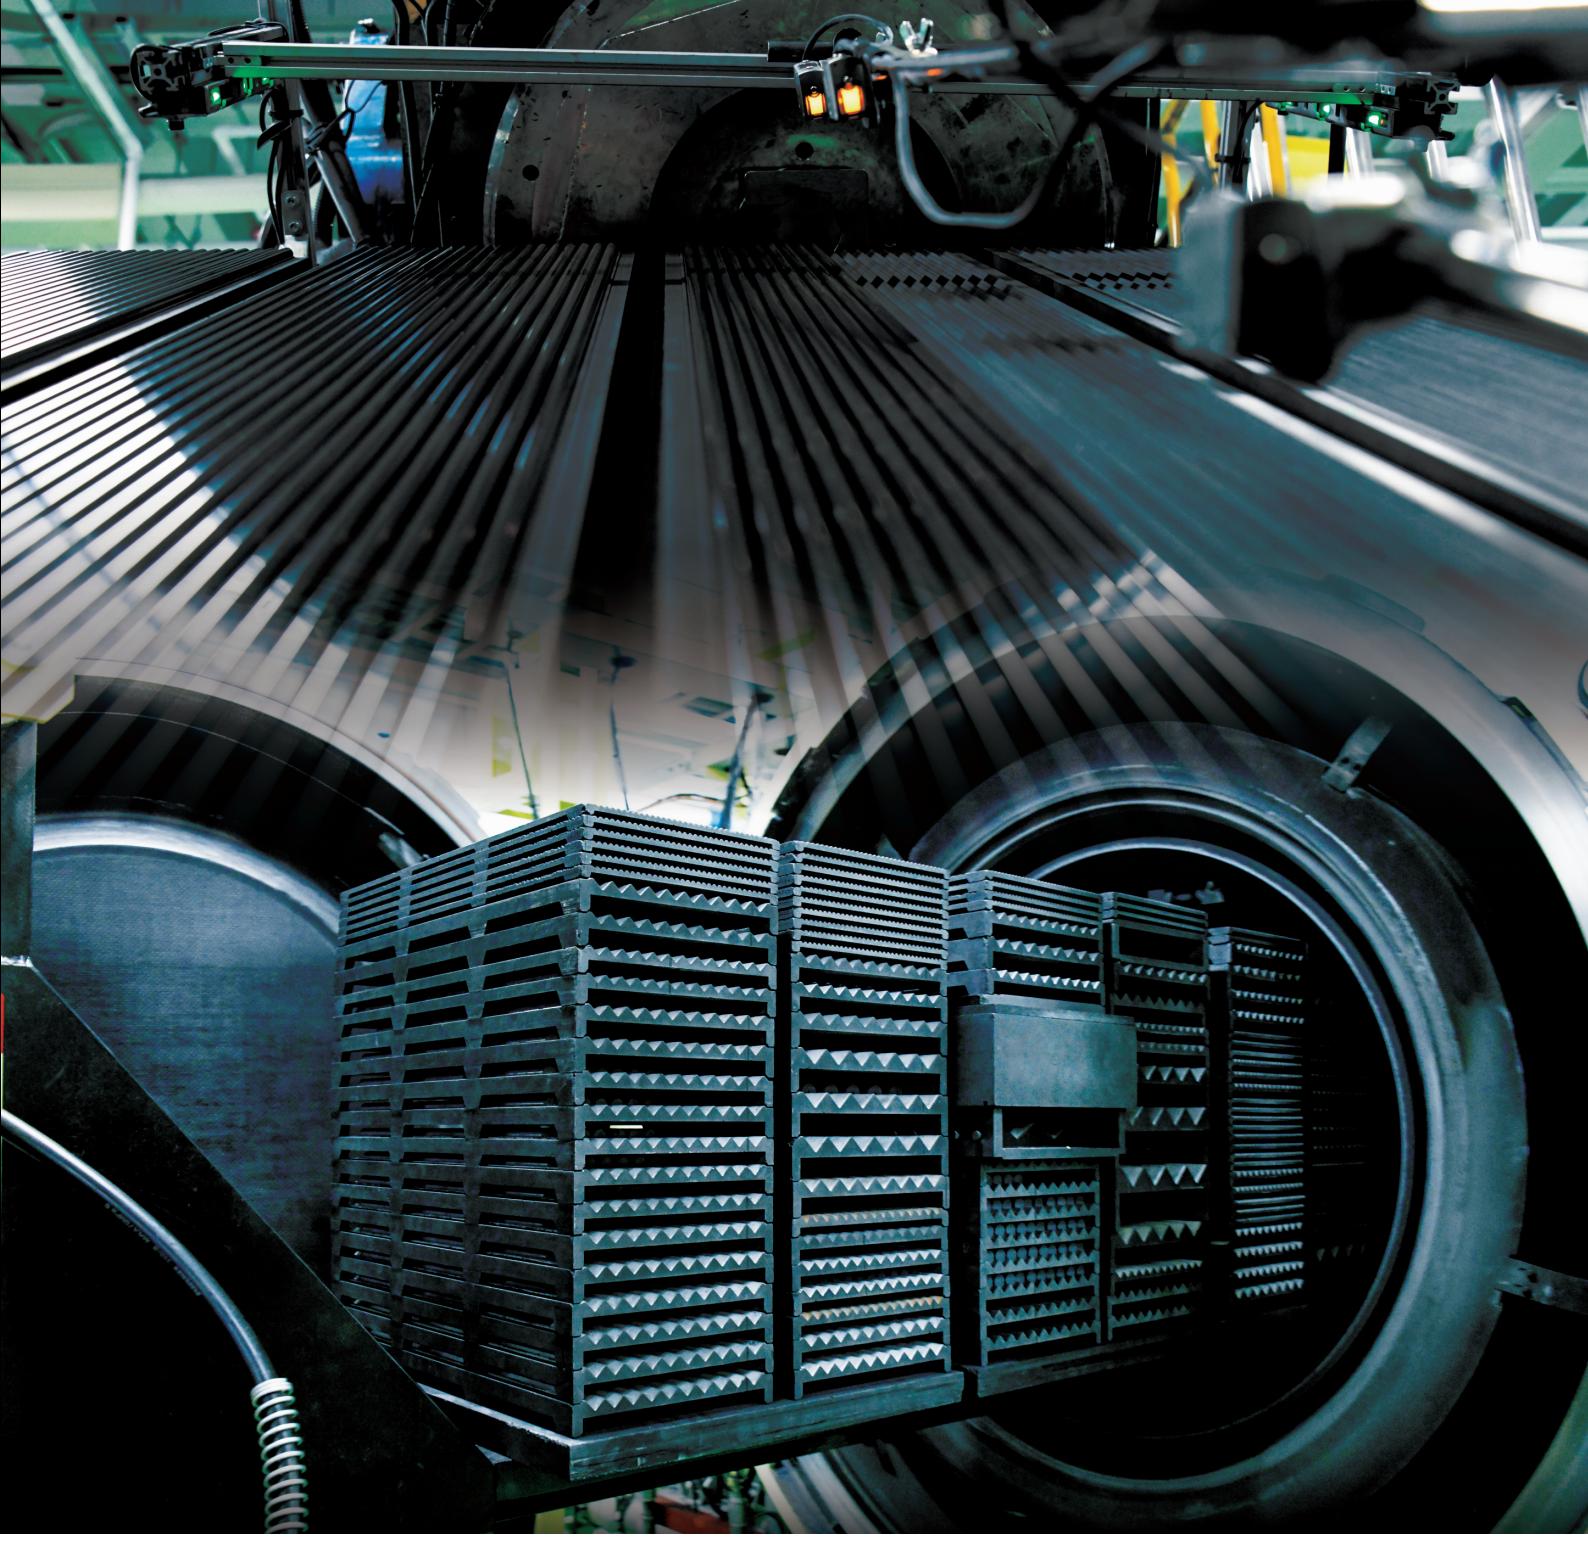


4 Forming (some of the products)

Semi-Sintering




400-700°C
(750-1290°F)

Forming (Machining)




5 Sintering



1400-1500°C
(2550-2730°F)


6 HIP (Hot Isostatic Pressing) (some of the products)



1400-1500°C
(2550-2730°F)
100-1000 atmospheric
with gas pressure

7 Inspecting

Physical properties
Dimensional &
visual inspection




Ultra fine grain
structure's micrograph

8

Packing & Shipping


Characteristics of Cemented Carbide

Relation between Composition and Characteristics

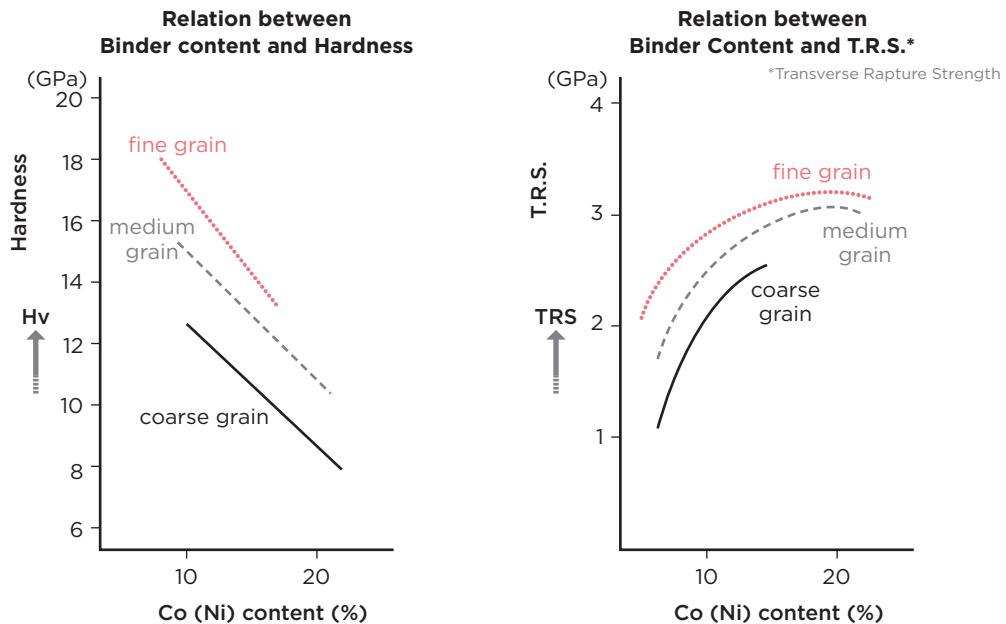


The characteristic of carbide blanks (hardness & TRS) is effected by the amount of metal binder or grain size of cemented carbide (WC). As Co content increases, hardness of cemented carbide decreases, but conversely, TRS increases.

The microstructure by different WC grain

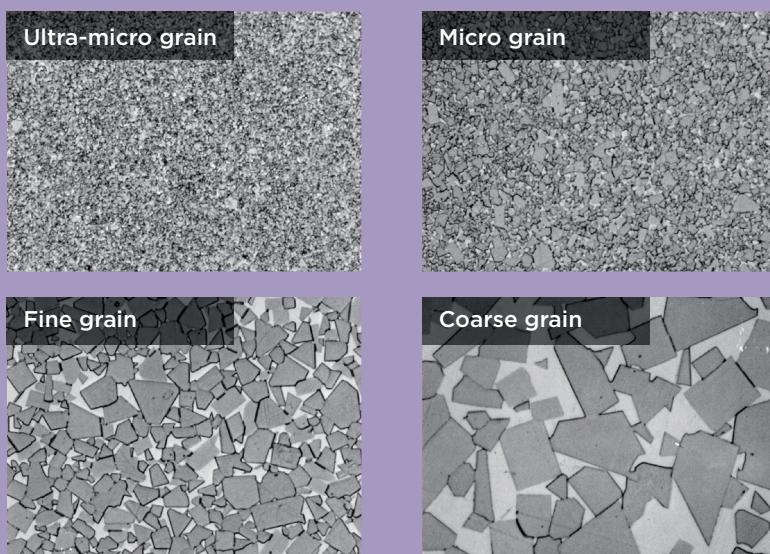


Carbide grades with ultra-micro grain, micro grain and fine grain are commonly used for endmills and drills.

Relation between grain size of WC and hardness or TRS

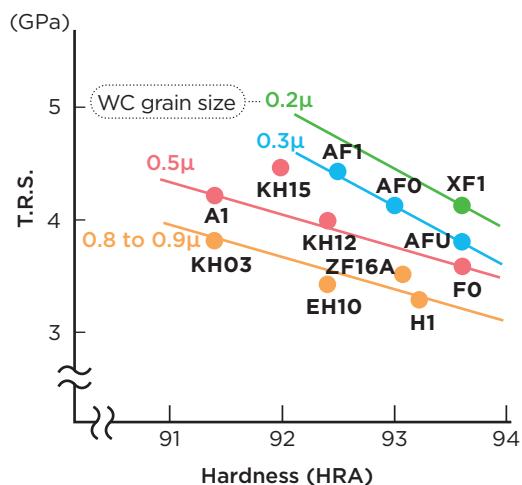

By using smaller grain size of WC, carbide shows higher hardness and TRS, but fracture toughness becomes lower.


Improvement of TRS by HIP

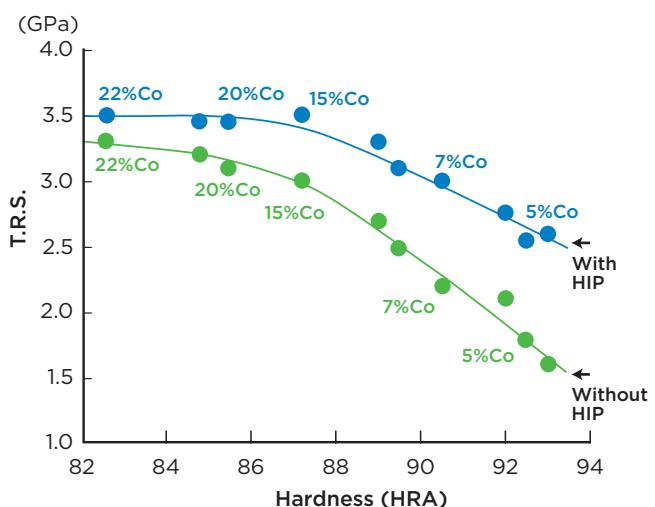




All of our carbide rods are treated by HIP to eliminate micro pore and improves TRS. (HIP is the process to treat carbide with high temperature and pressure.)

Relation between WC grain size and fracture toughness

Model of crack development

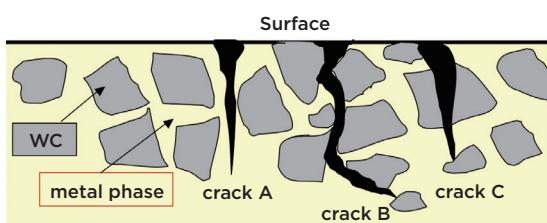

- A : Crack development in binder phase
- B : Crack development in binder phase -boundary surface of WC
- C : Crack development in WC

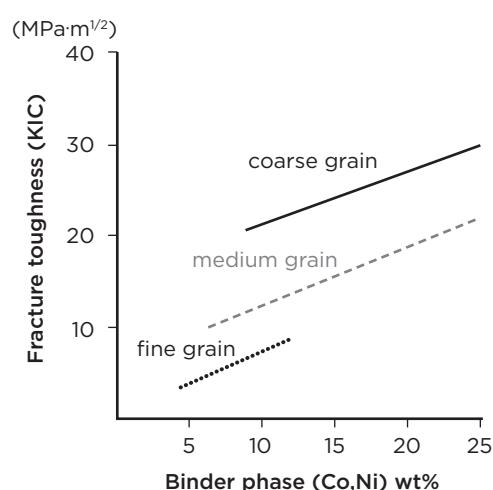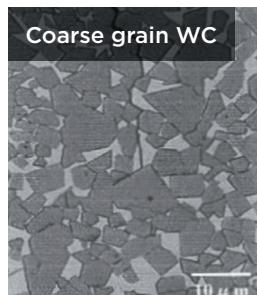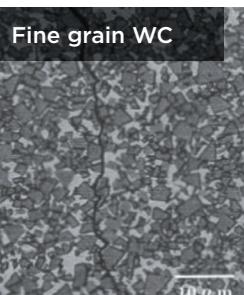

Carbide grade with coarse grain is effective for prevention of progress of cracks. It provide protection against chipping of cutting edges.




A long history of reliable performance and quality

Blanks for Round Tools

BLANKS FOR ROUND

D TOOLS



We produce not only simple round rods, but also formed round tool blanks with double helical coolant holes, central coolant hole, central coolant hole with some lateral holes. Moreover, we can form chamfering, multi-stepping, fluting and center-hole machining before sintering as the near net shape of customer's request.

(Forming rods: Refer to P17-18.)



Blanks for Round Tools


Properties of Grade for Round Tools

Class	Grade	ISO Code	Properties						
			Grain Size (µm)	Cobalt Content (wt%)	TRS (GPa)	HRA (HRA)	Hv (HV)	Fracture Toughness (MPa·m ^{1/2})	Young's Modulus (GPa)
Ultra Micro Grain	XF1	—	0.2	9.0	4.0	93.5	20.4	5.5	610
	AFU	—	0.3	8.0	3.8	93.6	19.4	6.0	610
	AFO*	—	0.3	10.0	4.1	93.0	18.1	7.3	590
	AF1	—	0.3	12.0	4.4	92.5	17.3	8.3	570
Micro Grain	F0*	—	0.5	5.0	3.6	93.6	20.1	6.7	650
	KH12	—	0.5	10.0	4.0	92.4	17.0	8.2	580
	KH15	—	0.5	12.0	4.4	92.0	16.3	9.0	580
	A1	—	0.5	13.0	4.2	91.4	15.6	8.6	560
	KH26	—	0.4	13.0	4.3	92.0	16.3	9.5	550
Fine Grain	H1	K01	0.8	5.0	3.3	93.2	17.7	6.3	660
	ZF16A*	K10	0.8	6.0	3.5	93.0	17.6	7.5	640
	KH03	K20	0.8	10.0	3.8	91.4	15.2	9.9	580
	EH10	K10	0.9	6.0	3.4	92.4	17.3	6.5	630

*Grade only for cutting tools for PCB




Carbide Grade for Endmills

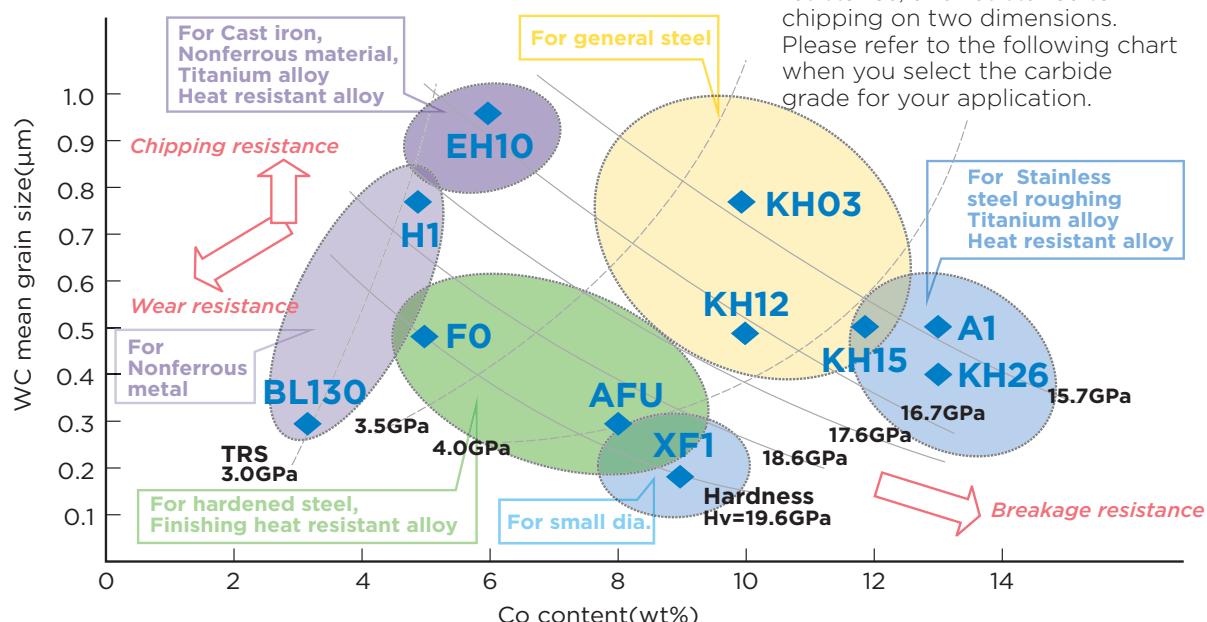

Blanks for Round Tools

■ Grade Recommendation by Application


Ultra Micro Grain



AF1

Grain Size : 0.3µm


Micro Grain



KH12

Grain Size : 0.5µm

Fine Grain



KH03

Grain Size : 0.8µm

Grade	Application			Work Material								
	Endmill	Drill	Drill 30°helical coolant hole	Soft Steel	General Steel	Hardened Steel	Stainless Steel	Titanium Alloy	Heat Resistant Alloy	Cast iron	Aluminium Alloy	Copper Alloy
XF1	●	●		○	○	◎	○		○			
AFU	●			○	○	◎						
AF1	●	●		○	○							
KH26	●			◎	◎	○	◎	◎	◎			
KH12	●		●	◎	◎	○	○	○	○	○	○	○
KH15	●			◎	◎	○	○	○	○			
A1	●	●		○	○		○					
H1	●	●								◎	◎	◎
KH03	●		●	○	○	○	○	○	○	○		
EH10	●	●				○	○	○	○	○	○	○

For more information on 30°helical coolant hole blanks, Refer to page 15-16.

Grade	Application		Work Material									
	Reamer		Soft Steel	General Steel	Hardened Steel	Stainless Steel	Titanium Alloy	Heat Resistant Alloy	Cast iron	Aluminium Alloy	Copper Alloy	
A1	●		○	○								
H1	●		○	○	○	○			◎	◎	◎	
EH10	●		○	○	○	○	○	○	○	○	○	

■ Application of Blanks for PCB Drills

Grade	Form		Diameter		
	Solid	Composite	Ultra Small Diameter (to Ø0.15)	Small Diameter (to Ø0.45)	General Diameter (Ø0.5 to)
XF1	●	●	◎	○	
AFU	●	●		◎	
AF0	●	●	○	◎	
F0	●				◎
ZF16A	●	●		○	○

● : Standard stocked item

◎ : Most recommended

○ : Recommended

Round Rods

Inventory

We keep round rod stocks of the chart below marked as ● to the shorten delivery time.

Stocked Grade

AFU	AF1	KH26	KH12
KH15	A1	H1	EH10



Stocked Item

Cat. No.	Diameter (mm)		Length (mm)		Grade							
	Nominal Diameter	Tolerance	Nominal Length	Tolerance	AFU	AF1	KH26	KH12	KH15	A1	H1	EH10
AR010310	1.0					●				●	●	●
AR015310	1.5	+0.3				●				●	●	●
AR020310	2.0	+0.2				●				●	●	●
AR025310	2.5					●				●	●	●
AR030310	3.0				●	●	●	●	●	●	●	●
AR035310	3.5				●	●		●		●	●	●
AR040310	4.0				●	●	●	●	●	●	●	●
AR045310	4.5				●	●		●		●	●	●
AR050310	5.0				●	●		●		●	●	●
AR055310	5.5	+0.5 +0.3			●	●		●		●	●	●
AR060310	6.0				●	●	●	●	●	●	●	●
AR065310	6.5				●	●		●		●	●	●
AR070310	7.0				●	●		●		●	●	●
AR075310	7.5				●	●		●		●	●	●
AR080310	8.0				●	●	●	●	●	●	●	●
AR090310	9.0				●	●		●		●	●	●
AR100310	10.0				●	●	●	●	●	●	●	●
AR110310	11.0					●				●	●	●
AR120310	12.0	+0.6 +0.3			●	●	●	●	●	●	●	●
AR130310	13.0											
AR140310	14.0							●	●	●	●	●
AR150310	15.0											
AR160310	16.0				●	●	●	●	●	●	●	●
AR170310	17.0											
AR180310	18.0	+0.7 +0.3			●	●		●	●	●	●	●
AR190310	19.0							●	●	●	●	●
AR200310	20.0				●	●		●	●	●	●	●

Unstocked items are available by order.

The above marked items are semi-standard stock, Please inquire about stock availability and delivery when ordering.

Standards of Round Rods

■ Available size

size availability is depending on the grade. Please refer to the map below.

Grade	Diameter						
	5	10	15	20	25	30	35
AF0	ø3						
F0	ø3						
ZF16A	ø3						
XF1			ø12				
BL130				ø16			
AFU							ø35
AF1					ø25		
KH26	ø3			ø16			
KH12					ø25		
KH15					ø25		
A1							ø35
H1					ø25		
KH03							ø35
EH10							ø35
Length	ø3 to ø25 Dia: 10L to 330L					ø25 to ø35 Dia: 10L to 170L	

■ Tolerance

Diameter (mm)	
1.0 ≤ D < 3.0	+0.3 +0.2
3.0 ≤ D ≤ 8.0	+0.5 +0.3
8.0 < D ≤ 15.0	+0.6 +0.3
15.0 < D ≤ 35.0	+0.7 +0.3

Length		Tolerance
10 ≤ L < 310	±0.5% (Minimum Tolerance: ±0.1)	0.15
310 ≤ L ≤ 330	+6.0 -0	

In some cases, this standard is different depending on the grade or diameter.



Round Rods with Helical Coolant Holes

The producible grade is KH12 and KHO3.

Although standard length is 310mm or 330mm, another shorter size is available by order.

We can form chamfering and centering over $\phi 5.6$ mm diameter.

Stepping is unavailable.



How to read our Cat. No.

Common **AR** **H** **056** **XXX**

Helix Angle, Number of OH,

Length (ex: "310"= 310mm "330"= 330mm)


Diameter (ex: "056"= $\phi 5.6$ "106"= $\phi 10.6$)

1H : 2 holes, 15°
H : 2 holes, 30° For Straight Drills
D : 2 holes, 30° For Step Drills
4H : 2 holes, 42°

ex: ARH056330 = $\phi 5.6 \times 330$ mm 2holes, 30° For Straight Drills


*1 Diameter (the Top and Bottom Diameter of Helical Groove)

Round rods with helical coolant hole has helical grooves on the surface. In the right chart, the diameter of top groove and bottom groove are expressed as "top groove diameter" and "bottom groove diameter" respectively.

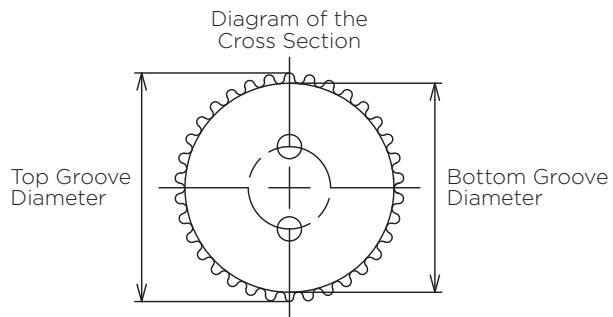

*2 Form

with Double Helical Oil Holes

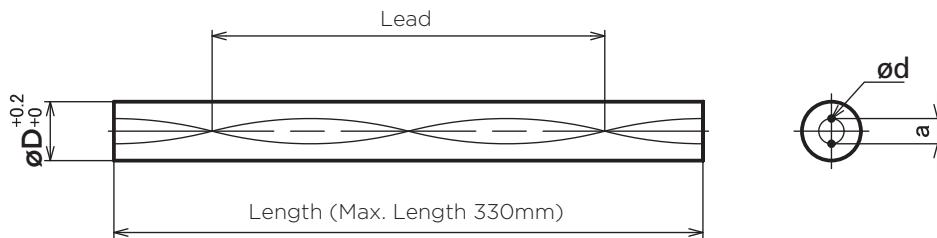

*Diameter tolerance of round rods with 15° helical coolant holes is "+0.4/-0".

Round Rods with Helical Coolant Holes

Dimentions

Helix Angle	Number of OH	Cat. No.	Diameter øD *1		Hole Diameter ød		Hole Pitch a		Lead Allowance	Producible Grade	
			Top Groove	Bottom Groove						KH12	KH03
15°	2	AR1H056XXX	5.55	5.25	0.71	±0.1	2.5	0/-0.3	54.8 to 63.0	—	—
		AR1H066XXX	6.55	6.25	0.83	±0.1	2.5	±0.2	65.7 to 75.6	—	—
		AR1H076XXX	7.55	7.25	0.95	±0.1	3.3	±0.2	76.7 to 88.2	—	—
		AR1H086XXX	8.55	8.25	1.06	±0.1	3.6	±0.2	87.6 to 100.8	—	—
		AR1H096XXX	9.55	9.25	1.18	±0.2	4.2	±0.2	98.6 to 113.4	—	—
		AR1H106XXX	10.55	10.25	1.30	±0.2	4.6	±0.2	109.6 to 126.0	—	—
		AR1H116XXX	11.55	11.25	1.30	±0.2	5.0	±0.2	120.5 to 138.6	—	—
		AR1H126XXX	12.55	12.25	1.42	±0.2	5.4	±0.2	131.5 to 151.2	—	—
		AR1H136XXX	13.55	13.25	1.54	±0.2	5.7	±0.2	142.4 to 163.8	—	—
		AR1H146XXX	14.55	14.25	1.66	±0.2	6.3	±0.2	153.4 to 176.4	—	—
		AR1H156XXX	15.55	15.25	1.77	±0.2	6.9	±0.2	164.3 to 189.0	—	—
		AR1H166XXX	16.55	16.25	1.89	±0.2	7.5	±0.2	175.3 to 201.6	—	—
30°	2	ARH036XXX	3.6	3.3	0.47	±0.05	1.50	0/-0.1	15.7 to 17.0	—	—
		ARH046XXX	4.6	4.3	0.59	+0.05/-0.1	1.7	0/-0.2	20.9 to 22.7	—	—
		ARH056XXX	5.6	5.3	0.71	±0.1	2.4	0/-0.3	26.2 to 28.4	—	—
		ARH066XXX	6.6	6.3	0.83	±0.1	2.8	±0.2	31.4 to 34.0	—	—
		ARH076XXX	7.6	7.3	0.95	±0.1	3.2	±0.2	36.6 to 39.7	—	—
		ARH086XXX	8.6	8.3	1.06	±0.1	3.6	±0.2	41.9 to 45.4	—	—
		ARH096XXX	9.6	9.3	1.18	±0.2	4.0	±0.2	47.1 to 51.0	—	—
		ARH106XXX	10.6	10.3	1.30	±0.2	4.4	±0.2	52.3 to 56.7	—	—
		ARH116XXX	11.6	11.3	1.30	±0.2	4.4	±0.2	57.5 to 62.4	—	—
		ARH126XXX	12.6	12.3	1.42	±0.2	4.8	±0.2	62.8 to 68.1	—	—
		ARH136XXX	13.6	13.3	1.54	±0.2	5.2	±0.2	68.0 to 73.7	—	—
		ARH146XXX	14.6	14.3	1.66	±0.2	5.6	±0.2	73.2 to 79.4	—	—
		ARH156XXX	15.6	15.3	1.77	±0.2	6.0	±0.2	78.5 to 85.1	—	—
		ARH166XXX	16.6	16.3	1.89	±0.2	6.4	±0.2	83.7 to 90.7	—	—
		ARH176XXX	17.6	17.3	2.01	±0.2	6.8	±0.2	88.9 to 96.3	—	—
		ARH176XXX-1	17.6	17.3	1.75	±0.2	8.5	±0.2	—	—	—
		ARH186XXX	18.6	18.3	2.13	±0.2	7.2	±0.2	—	—	—
		ARH186XXX-1	18.6	18.3	2.00	±0.2	9.2	±0.2	94.1 to 102.0	—	—
		ARH196XXX	19.6	19.3	2.28	±0.2	7.6	±0.2	—	—	—
		ARH196XXX-1	19.6	19.3	2.00	±0.2	9.7	±0.2	99.3 to 107.7	—	—
		ARH206XXX	20.6	20.3	2.36	±0.2	8.0	±0.2	104.6 to 113.4	—	—
		ARH206XXX-1	20.6	20.3	2.00	±0.2	9.9	±0.2	—	—	—
30°	2	ARD036XXX-1	3.6	3.3	0.23	±0.05	0.8	-0.1/-0.2	15.7 to 17.0	—	—
		ARD036XXX-2	3.6	3.3	0.35	±0.05	1.2	0/-0.2	15.7 to 17.0	—	—
		ARD046XXX	4.6	4.3	0.35	±0.05	1.2	0/-0.2	20.9 to 22.7	—	—
		ARD056XXX	5.6	5.3	0.47	±0.05	1.5	0/-0.3	26.2 to 28.4	—	—
		ARD066XXX	6.6	6.3	0.47	±0.1	2.0	±0.2	31.4 to 34.0	—	—
		ARD076XXX	7.6	7.3	0.59	±0.1	2.0	±0.2	36.6 to 39.7	—	—
		ARD086XXX	8.6	8.3	0.71	±0.1	2.4	±0.2	41.9 to 45.4	—	—
		ARD096XXX	9.6	9.3	0.83	±0.1	2.8	±0.2	47.1 to 51.0	—	—
		ARD106XXX	10.6	10.3	0.95	±0.1	3.2	±0.2	52.3 to 56.7	—	—
		ARD116XXX	11.6	11.3	0.95	±0.1	3.2	±0.2	57.5 to 62.4	—	—
		ARD126XXX	12.6	12.3	1.06	±0.1	3.6	±0.2	62.8 to 68.1	—	—
		ARD136XXX	13.6	13.3	1.06	±0.1	3.6	±0.2	68.0 to 73.7	—	—
		ARD146XXX	14.6	14.3	1.18	±0.2	4.0	±0.2	73.2 to 79.4	—	—
		ARD156XXX	15.6	15.3	1.30	±0.2	4.4	±0.2	78.5 to 85.1	—	—
		ARD166XXX	16.6	16.3	1.42	±0.2	4.8	±0.2	83.7 to 90.7	—	—
42°	2	AR4H033XXX-1	3.3	3.2	0.20	±0.05	0.5	±0.05	10.1 to 10.8	—	—
		AR4H033XXX-2			0.14	±0.03	0.5	0/-0.1	10.1 to 10.8	—	—

Blank: Made-to-order item —mark: Not available


Formed Round Rods

■ Grades to Be Formed

Diameter	ø3 to ø16	XF1 KH26	ø3 to ø25	AF1 KH12 KH15 H1	ø3 to ø35	AFU A1 KH03 EH10
----------	-----------	---------------------	-----------	-------------------------------------	-----------	-------------------------------------

■ Available Size

Length	ø3 to ø25	to 330L
	ø25 to ø35	to 170L





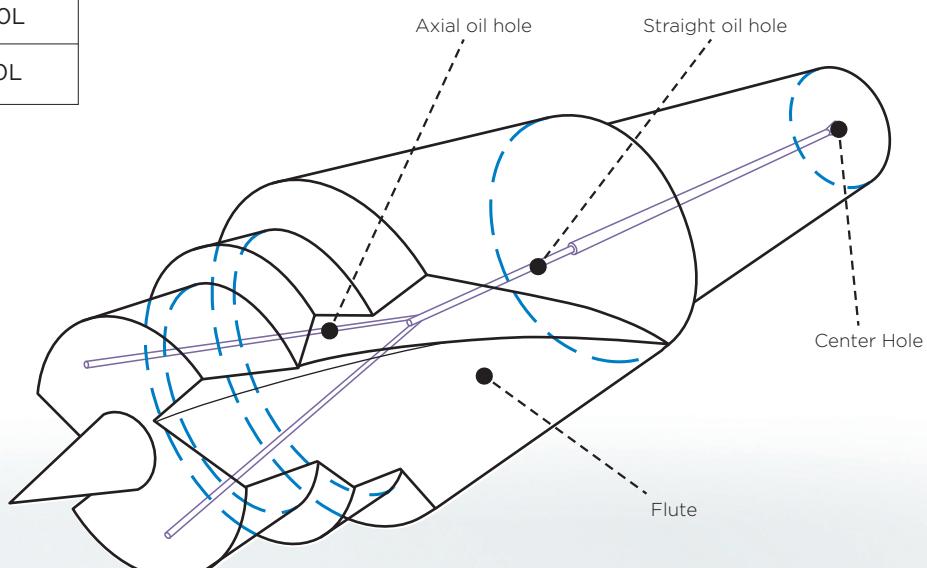


Formed rods as near net shape are available on request.

Formed Round Rods

Formed Example

Producible Measurement : Diameter 3mm to 35mm / Length up to 320mm

Taper	V-Groove/Point angle
	 
Spot Face	Straight oil hole/ axial oil hole
	  Through hole: Maximum Length 320L Blind hole: Maximum Length 170L


*Maximum length is different by diameter.
*Minimum diameter: ø0.8

Multi-step	Flute* (Accommodate for right handed and flute) * Maximum length: 220L We can form helical angle flute, straight flute, and flat face. Please contact us about helical flute specifications.	We can form Other specific shape. Please feel free to contact us.
-------------------	--	---

Standard Dimensions


Female Center

Diameter(ϕ)	ϕD	ϕd	L
3.0 to 3.5	1.3	0.8	1.43
3.6 to 6.3	1.5	1.0	1.63
6.4 to 10.0	2.0	1.5	2.23
10.1 to	3.0	2.0	3.87

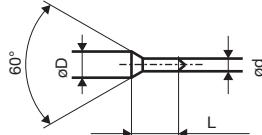


Male Center

Diameter ϕD	ϕd
3.0 to 5.0	3.0
5.1 to 10.0	4.0
10.1 to 20.0	5.0
20.1 to	6.0

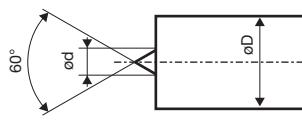

Chamfer

Diameter ϕD	C
3.0 to 5.0	0.5
5.1 to 10.0	1.0
10.1 to 15.0	1.5
15.1 to 20.0	1.8
20.1 to 25.0	2.0
25.1 to	2.5

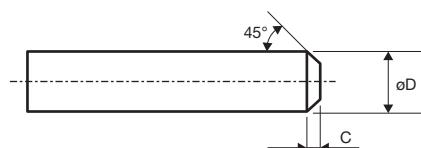

These tables show our standard. we can provide other forms according to your request.

The various carbide materials developed
from abundant experience as a tool manufacture

**Blanks for various cutting tools,
wear resistant tools, dies & molds**

**BLANKS FOR VARIOUS
WEAR RESISTANT TOOLS,
DIES & MOLDS**

ols,
olds

US CUTTING TOOLS,
OLS,



Blanks for various cutting tools, wear resistant tools, dies & molds

The various carbide materials developed from abundant experience as a tool manufacture

Various Grades depending on the Application

For general cutting tools

P grade : **ST10P, ST20E,
A30N, ST40E**

M grade : **U10E, U2, A40**

K grade : **H1, EH10, KHO3,
EH20, G10E, KH05**

Micro & Ultra micro grain grade

**AFU, XF1, F0, F1,
AF1, A1**

Cermet

**T1200A,
T250A**

For wear resistant tools

**D1, D2, D3,
G5, G6, G7, G8**

For impact resistant tools

**GR30, GR40,
GR50, GH65**

For high wear resistant tools

BL005, BL100, BL130


For anti-corrosive tools

M3, M23S


Blanks for various cutting tools, wear resistant tools, dies & molds

Grade Map


For general cutting tools (P & M grade)

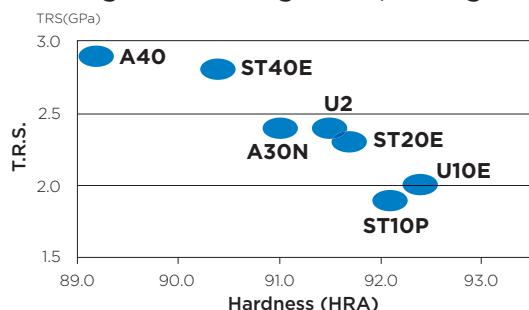


For general cutting tools (K grade)

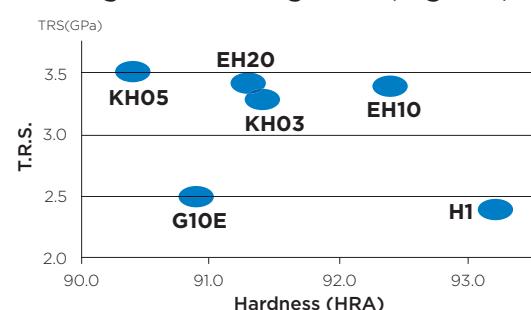


For wear resistant tools

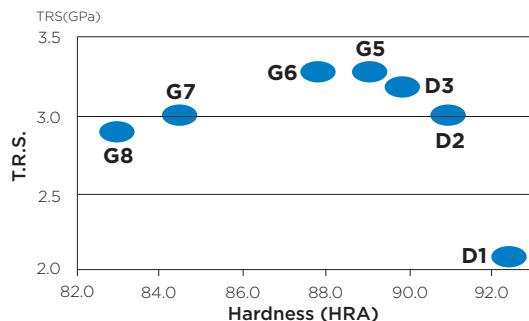


For impact resistant tools

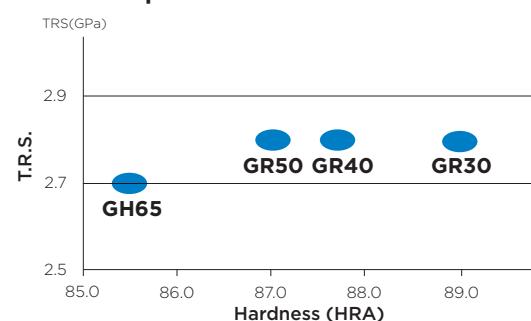


Cermet

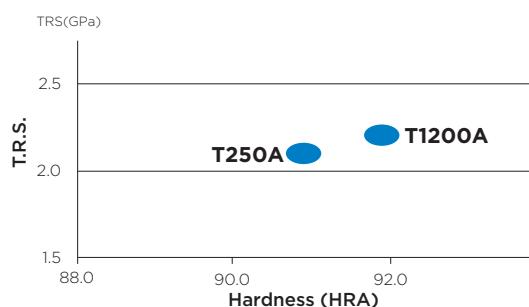


Micro & Ultra micro grain grade

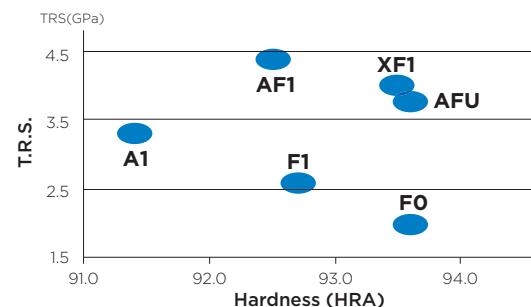

For high wear resistant tools

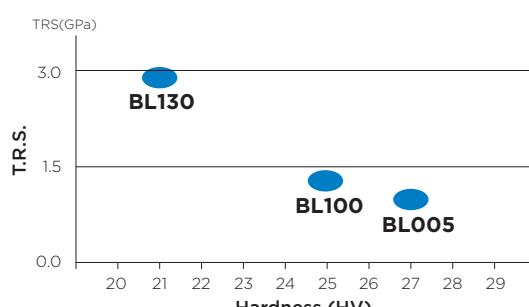

For anti-corrosive tools

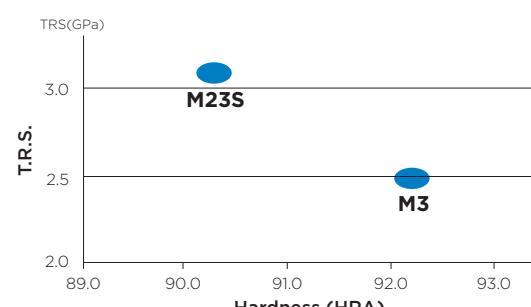

Grade Property (Typical Value)

Application	Classification	ISO Code	Grade	Specific Gravity	Grain Size	Binder Content	Hardness		
					(µm)	(wt%)	HRA	Hv(GPa) @RT	
For general cutting tools	P grade	P10	ST10P	10.5	2.0	9.0	92.1	16.0	
		P20	ST20E	11.9	2.0	8.5	91.7	15.8	
		P30	A30N	11.6	3.4	11.5	91.0	14.9	
		P40	ST40E	13.2	2.0	11.5	90.4	14.3	
	M grade	M10	U10E	12.9	2.0	5.5	92.4	16.9	
		M20	U2	13.2	2.0	8.0	91.5	15.6	
		M40	A40	13.2	1.4	15.0	89.2	12.9	
	K grade	K10	H1	15.1	0.8	5.0	93.2	17.7	
		K10	EH10	14.9	0.9	6.0	92.4	17.3	
		K10	G10E	14.8	2.5	6.0	90.9	15.4	
		K20	EH20	14.9	2.5	6.0	91.3	15.8	
		K20	KH03	14.5	0.8	10.0	91.4	15.2	
		K40	KH05	14.2	0.8	13.0	90.4	13.6	
	Cermet	P10	T1200A	6.7		15.0	91.9	15.6	
		P30	T250A	7.1		16.5	90.9	14.0	
For wear & impact resistant tools	Wear resistant tools	—	D1	14.9	1.2	6.0	92.4	16.7	
		—	D2	14.9	2.0	7.0	90.9	15.0	
		—	D3	14.7	2.0	10.0	89.8	13.7	
		—	G5	14.3	2.0	12.0	89.0	13.1	
		—	G6	14.1	2.0	15.0	87.8	11.9	
		—	G7	13.6	3.0	20.0	84.5	9.3	
		—	G8	13.2	3.0	25.0	83.0	8.2	
	Impact resistant tools	—	GR30	14.9	3.3	8.0	89.0	12.9	
		—	GR40	14.6	4.0	9.5	87.7	11.8	
		—	GR50	14.5	4.0	10.5	87.0	11.2	
		—	GH65	14.0	4.0	15.5	85.5	10.2	
		—	GR70	14.0	4.0	18.0	84.5	9.3	
For special application	Micro fine grain	—	F0	14.9	0.5	5.0	93.6	20.1	
		—	F1	14.5	0.5	8.5	92.7	18.0	
		—	A1	14.1	0.5	13.0	91.4	15.6	
	Ultra micro fine grain	—	AFU	14.6	0.3	8.0	93.6	19.4	
		—	AF1	14.1	0.3	12.0	92.5	17.3	
		—	XF1	14.5	0.2	9.0	93.5	20.4	
For high wear resistant tools		—	BL005	15.5	0.2	0.5		27.0	
		—	BL100	15.4	0.3	0.5		25.3	
		—	BL130	15.2	0.3	3.0	94.2	21.0	
For anti-corrosive tools		—	M3	14.3	0.8	9.5	92.2	16.9	
		—	M23S	14.8	2.0	8.0	90.3	14.2	
For lenses forming mold		—	BL005L	15.5	0.2	0.5	—	27.0	
		—	BL130L	15.2	0.3	3.0	94.2	21.0	
		—	AF1L	14.1	0.3	12.0	92.5	17.3	

The above is our standard grades. Please feel free to contact us for other grades.

Grade Property (Typical Value)

**By indentation method

		T.R.S.	Fracture Toughness K1c **	Compressive Strength	Impact Strength	Young's Modulus	Thermal Conductivity (RT)	Poisson's Ratio	Thermal Expansion Coefficient	
	Hv(GPa) @600°C	Hv(GPa) @800°C	(GPa)	(MPa·m ^{1/2})	(GPa)	(x10 ⁻⁴ GPa·m)	(GPa)	(W/(m·K))	v	(x10 ⁻⁶ /K) (to 400°C)
	8.9	5.9	1.9	8.1	4.9		470	0.22	14	6.2
	8.7	5.7	2.3				510	0.22	31	6.2
	8.3	5.2	2.4	9.1			520	0.22	31	6.5
	8.7	5.1	2.8				530	0.22	59	6.0
	9.8	6.6	2.0		5.9		560	0.21	46	5.6
	9.6	6.0	2.4	8.5			550	0.22	55	5.7
	7.4	4.3	2.9	11.5			520	0.23	65	6.2
	12.9	8.2	2.4	6.3	6.1		650	0.21	109	4.7
	12.0	7.3	3.4	6.5			640	0.21	105	4.5
	10.8	6.6	2.5	8.5	5.7		620	0.21	105	5.0
	10.0	5.9	3.4				620	0.21	84	4.5
	10.3	5.6	3.3	9.9			580	0.22	76	5.3
	9.0	4.4	3.5	10.8			550	0.22	78	5.7
			2.2	7.0			440	0.22	15	7.9
	8.7	5.8	2.1	8.5			390	0.27	26	7.9
	12.0	7.4	2.1	6.5			630	0.21		5.0
	10.4	6.0	3.0	8.3	5.5	0.72	640	0.21	98	5.7
			3.2	10.3			590	0.22	96	5.4
	7.7	4.2	3.3	13.5	4.8	0.81	580	0.22	96	6.3
	7.3	3.9	3.3	17.5	4.4	0.77	540	0.23	71	5.9
	4.3	2.6	3.0	18.5		0.73	490	0.24	97	6.6
			2.9	20.0	3.2	0.89	460	0.24	63	7.1
	7.9	4.7	2.8				610	0.21		5.1
	5.9	3.9	2.8		4.5	0.47	520	0.22	76	5.0
	5.3	3.7	2.8		4.3	0.62	520	0.22	76	5.5
			2.7				530	0.23		5.9
			2.0	6.7			650	0.21	47	5.0
	12.8	6.9	2.6	7.8			600	0.22	47	5.3
	9.5	4.7	3.3	8.6			560	0.23	42	5.7
			3.8	6.0			610	0.22	52	5.3
			4.4	8.3			570	0.22	36	5.5
			4.0	5.5			610	0.22	38	5.4
			1.0	3.5			670	0.21	37	4.5
	20.3	17.5	1.3	4.5			680	0.21	47	4.2
	14.5	9.6	2.9	5.4			660	0.20	56	4.5
	11.1	6.1	2.5	8.0			570	0.22	59	5.5
	9.0	5.3	3.1	8.5	4.9	0.99	600	0.22	85	5.9
			1.0	3.5			670	0.21	37	4.5
	14.5	9.6	2.9	5.4			660	0.20	56	4.5
			4.4	8.3			570	0.22	36	5.5

*These TRS values are different from the values described on page11.
If higher TRS value is required, please contact us.

Application of each Grade

ISO Code	Grade	Property	Application																					
			General Cutting Tool (Work Material)				Ware resistant	Circular saw		Slitter & Blade	Die & Mold			Nozzle										
				T.R.S GPa	Hardness HRA	General steel	Cast iron	Stainless steel	Exotic material	Nonferrous metal	Wear resistance	Impact resistance	Wood	Particle board	General steel	Stainless steel	General cutting	Metal cutting	Crushing	Press mold	Plastic injection mold	Powder compacting mold	Forging mold	Glass lens mold
For general cutting tools	P grade	P10	ST10P	1.9	92.1	○																		
		P20	ST20E	2.3	91.7	○		○																
		P30	A30N	2.4	91.0	○		○									○							
		P40	ST40E	2.8	90.4	○		○																
	M grade	M10	U10E	2.0	92.4	○	○	○	○															
		M20	U2	2.4	91.5	○	○	○	○															
		M40	A40	2.9	89.2	○	○	○																
	K grade	K10	H1	2.4*	93.2	○												○						
		K10	EH10	3.4	92.4	○				○								○						
		K10	G10E	2.5	90.9	○			○	○														
		K20	EH20	3.4	91.3	○				○														
		K20	KH03	3.3*	91.4	○		○											○	○				
	Cermet	K40	KH05	3.5	90.4	○													○	○				
For wear & impact resistant tools	Ware resistance	—	D1	2.1	92.4						○							○	○	○	○			
		—	D2	3.0	90.9						○	○						○	○	○	○			
		—	D3	3.2	89.8						○	○												
		—	G5	3.3	89.0						○	○												
		—	G6	3.3	87.8						○	○												
		—	G7	3.0	84.5						○	○												
		—	G8	2.9	83.0						○	○												
		—	GR30	2.8	89.0						○	○												
	Impact resistance	—	GR40	2.8	87.7						○	○							○	○				
		—	GR50	2.8	87.0						○	○							○	○				
		—	GH65	2.7	85.5						○													
For Specific Purpose	Circular saw	Micro fine grain	F0	2.0*	93.6	○					○							○	○					
			F1	2.6	92.7	○					○							○	○					
			A1	3.3*	91.4						○	○						○	○		○			
			AFU	3.8	93.6						○							○	○					
		Ultra micro grain	AF1	4.4	92.5						○							○	○		○			
			XF1	4.0	93.5															○				
		P grade carbide	K82S	2.1	91.7													○	○					
			A30N	2.4	91.0													○	○					
			A30S	2.5	91.0													○	○					
			K72S	2.6	90.0													○	○					
			A35S	2.4	90.4													○	○					
	Cermet	YC01F	2.3	92.4													○	○						
		KA30	1.8	92.1													○	○						
		YC03F	2.2	91.6													○	○						
		YC05F	2.5	91.1													○	○						
	High wear resistance	GK21A	3.1	90.5							○													
		BL720	2.9	93.4													○							
		BL220	2.9	92.8													○							
		BL230	2.5	92.0													○							
	For high wear resistance	BL005	1.0	—							○													
		BL100	1.3	—							○													
		BL130	2.9	94.2	○						○							○						
	For anti-corrosiveness	M3	2.5	92.2							○													
		M23S	3.1	90.3							○													
	For lenses forming mold	BL005L	1.3	—																				
		BL130L	2.9	94.2																				
		AF1L	4.4	92.5																				


*These TRS values are different from the values described on page11.
If higher TRS value is required, please contact us.

(-)Please refer to page 23
for the hardness of BL005 and BL100

○:Most recommended
◎:Recommended

Application of each Grade

■ Producible Blank for General Cutting Tools,
Wear & Impact Resistant Tools

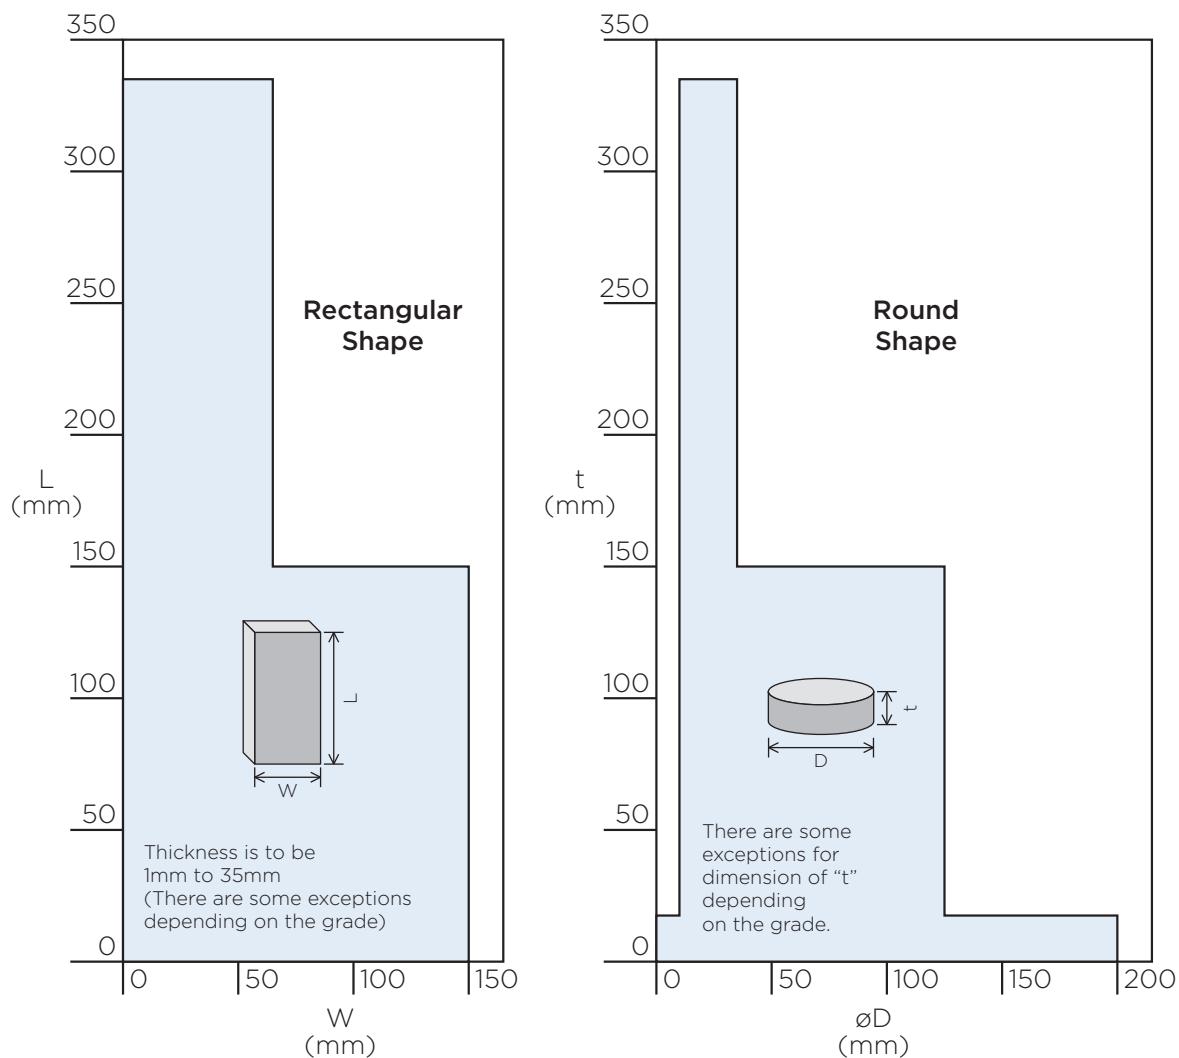

Please use the above charts only as a guide.
Please contact us for the detail.

Measurement (mm)	Tolerance
5 or less	± 0.10 mm
over 5 bellow 10	± 0.15 mm
over 10 bellow 20	± 0.20 mm
over 20 bellow 30	± 0.25 mm
over 30 bellow 40	± 0.30 mm
over 40 bellow 50	± 0.35 mm
over 50	$\pm 0.7\%$


Blanks for General Cutting Tools




■ Application Example

Brazed tools / Tools for auto-lathe / Drills
Endmills / Reamers

■ Applicable Grades

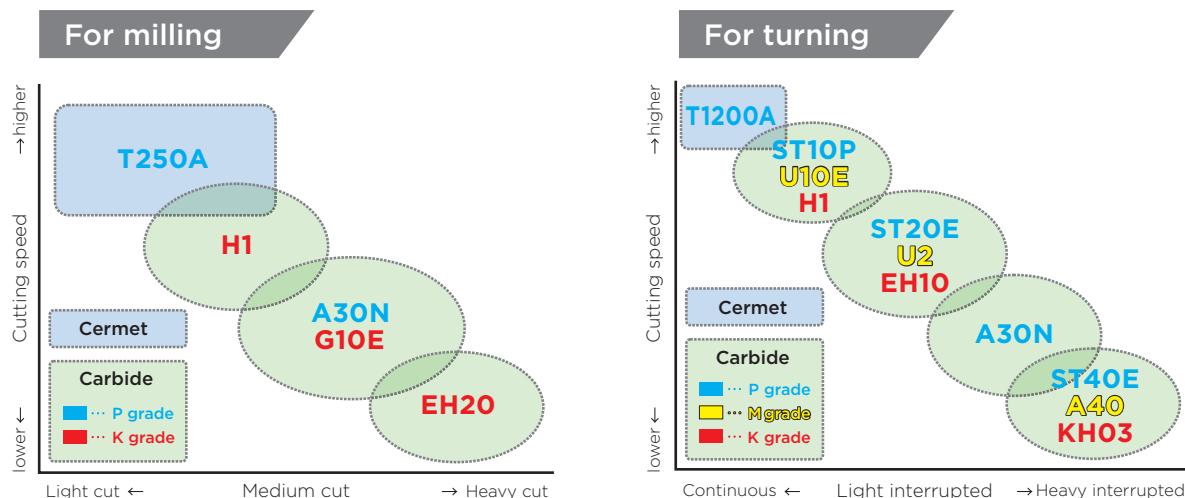

Blanks for Wear & Impact Resistant tools

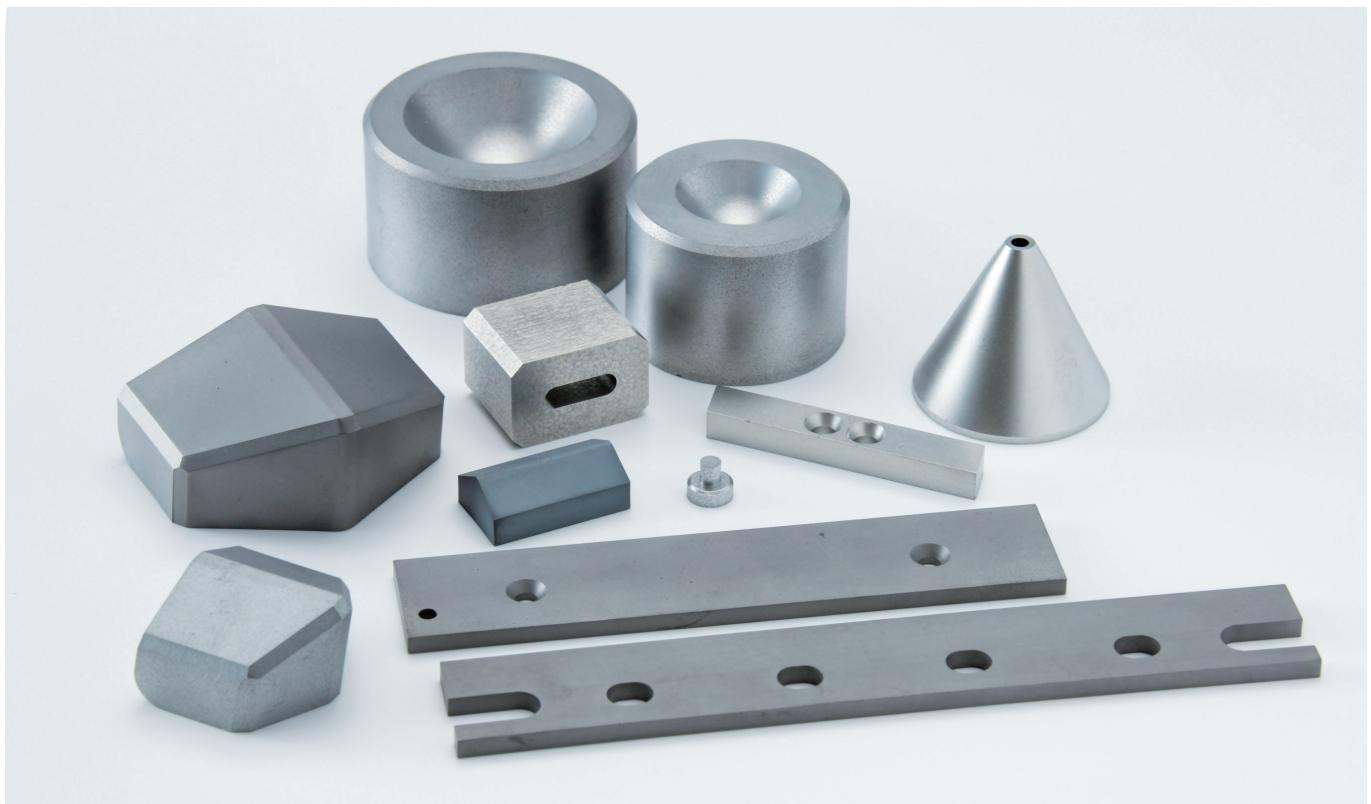


■ Application Example

Punches / Die molds / Sleeves
Crushing tools / Sliding parts


■ Microstructure of Typical Grades



Ultra micro grain
AF1

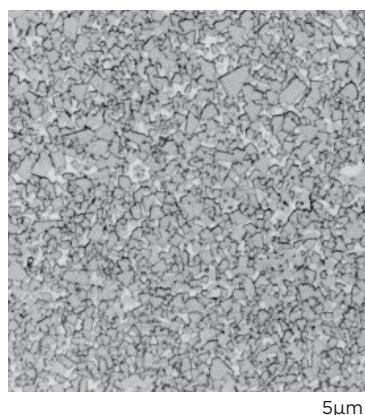


Medium grain
G5

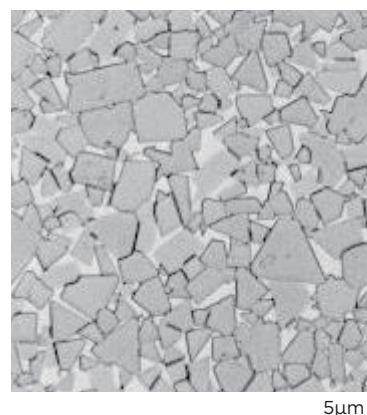

coarse grain
GR50


Blanks for Slitters & Blades / Die & Mold

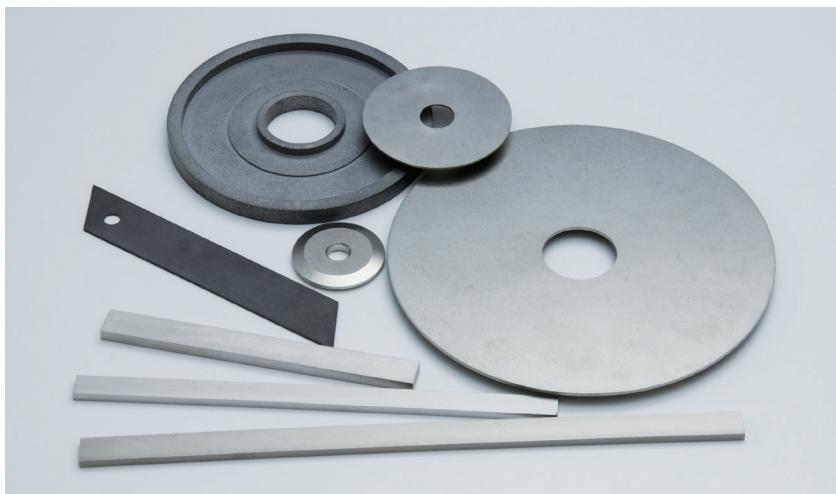

■ Application Example

Slitters & blades for textile,
Food, Electric / Electronics parts,
Resin, Automotive parts, Rubber, etc.

Blade for crushing application.

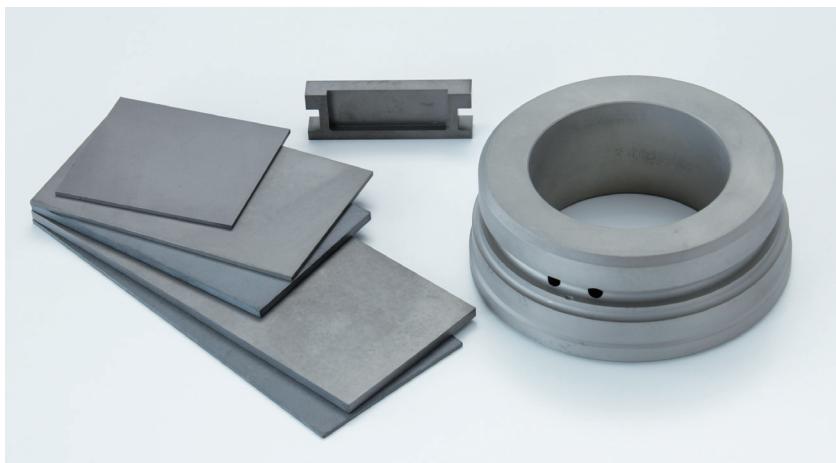

The die & mold demand spreads with the expansion of the new products such as smart phones or tablet terminals.

On the other hand the performance enhancement of the die & mold is pursued with miniaturization and the densification of molding materials.

We have many customers who support our carbide material for die & mold including AF1 which shows stable high efficiency.

Ultra micro grain grade **AF1**

This is the ultra micro grain grade with 0.3 grain which enables us to get sharp cutting edges.
AF1 has the extreme high TRS and hardness which bring a long tool life for precision die & molds.

General grades for wear resistant tools **D1 / D2 / D3 / G5 / G6 / G7 / G8**

The above shows general carbide grades for wear resistant tools.
It is a turn of D1, D2, D3, G5, and G6 from abrasion resistant high one
Please choose the suitable grade depending on the requirement.

Micro Grain Grade **KH03 / KH05**

They are well balanced grades of both hardness and TRS, recommended for punches and dies.

Grade for impact resistant tools **GR30 / GR40 / GR50 / GH65**

They are grades to resist high impact force such as cold forging.
Please refer to the bellow chart to choose the suitable grade.


Blanks for Die & Mold

■ Grades for Die & Mold and its Application

Applicable Grade		Press mold								Plastic injection mold				Powder compacting mold		Drawing die & Plug	Cold forging die
		Lead frame (Aluminum, Copper)		Connector (Blanking, Bending) (Phosphor Bronze)		Connector (Blanking, Bending) (SUS)		Motor core									
Classification	Grade	Punch	Die	Punch	Die	Punch	Die	Punch Die	Pot	Plunger	Gate	LF fixing pin	Punch	Die			
Micro grain grade	Fine grain	KH03	◎		◎	○	◎		◎		◎						
	KH05	○		○		○		○	○		○						
	Micro grain	F0	○	○													
	F1	○	○														
	A1	○	○														
	Ultra micro grain	AFU	○	○													
	AF1	◎		◎		◎											
	XF1	○	○														
	—	D1							○		○			○			
Wear resistant grade	—	D2							○		○			○	○		
	—	D3							○		○			○			
	—	G5							○	○	○	○			○		
	—	G6							○	○	○	○			○		
	—	G7													○		
	—	G8													○		
	—	GR30													○		
Impact resistant grade	—	GR40													○		
	—	GR50													○		
	—	GH65													○		

◎:Most recommended O:Recommended

Fig 1

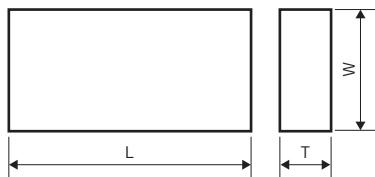

■ Stock

Cat. No.	Dimensions (mm)						Grade				Fig
	Nominal Dimensions	Tolerance	Nominal Dimensions	Tolerance	Nominal Dimensions	Tolerance	A1	AF1	KH03	KH05	
OB10060012	1.2						●	●	●	●	1
OB10060015	1.5						●	●	●	●	1
OB10060020	2.0	+0.5 +0.2	100	+1.5 0	60	+1.0 0	●	●	●	●	1
OB10060025	2.5						●	●	●	●	1
OB10060030	3.0						●	●	●	●	1
OB10060040	4.0						●	●	●	●	1
OB15060020	2.0						●	●	●	●	1
OB15060025	2.5						●	●	●	●	1
OB15060030	3.0						●	●	●	●	1
OB15060035	3.5						●	●	●	●	1
OB15060040	4.0						●	●	●	●	1
OB15060045	4.5						●	●	●	●	1
OB15060050	5.0	+0.5 +0.2	150	+1.5 0	60	+1.0 0	●	●	●	●	1
OB15060055	5.5						●	●	●	●	1
OB15060060	6.0						●	●	●	●	1
OB15060070	7.0						●	●	●	●	1
OB15060080	8.0						●	●	●	●	1
OB15060090	9.0						●	●	●	●	1
OB15060100	10.0						●	●	●	●	1

Plates with top and bottom faces ground can be made to order.

Binder-less Carbide Blanks for Lens Forming Mold

High hardness and high surface quality are realized adopting ultra micro gain WC and minimal Co content.




■ Grade Property


Grade	Grain size (μm)	Co content (wt%)	Specific gravity	Hardness		T.R.S. (GPa)	KIC (MPa) (m ^{1/2})	Thermal expansion coefficient(x10 ⁻⁶ /°C)			Characteristics				
				HRA	Hv (GPa)			400°C	600°C	800°C	Hardness	Low thermal expansion	Surface quality	Grind ability	
Minimal Co content	BL100L	0.3	0.5	15.4	—	25.3	1.3	4.5	4.2	4.5	4.8	◎	◎	◎	△
Low Co content	BL130L	0.3	3	15.2	94.2	21.0	2.9	5.4	4.5	4.8	5.2	○	○	○	○
Ultra micro grain WC	AF1L	0.3	12	14.1	92.5	17.3	4.4	8.3	5.5	5.8	6.3	△	△	◎	◎

■ Microstructure

WC grain is grey and Co is black in the following photo.

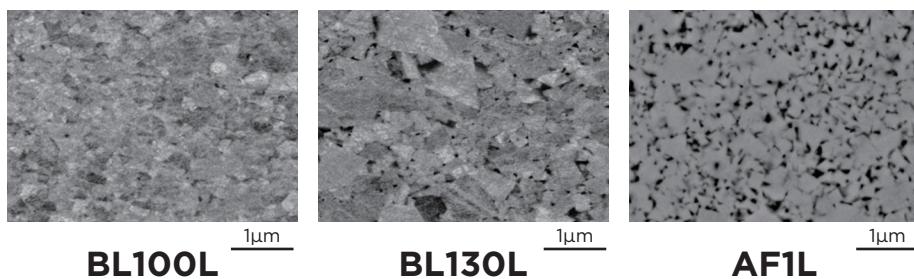

■ Producible Blank Dimensions.

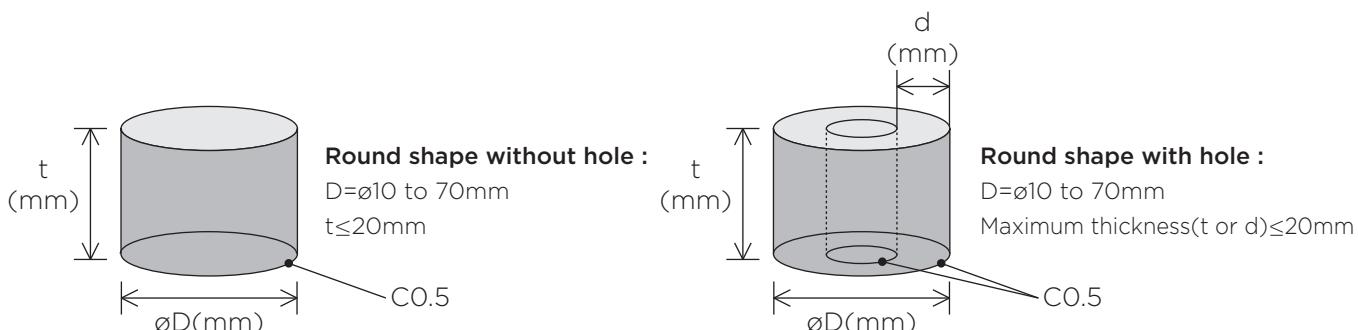

A chamfer of about C0.5 on the inside and outside diameter of the bottom surface is added to prevent chipping.

Producible dimensions are restricted comparing with other grades.

*If you have a requirement which is other than the above producible dimensions, please contact us.

Anti-Corrosive Carbide Blanks

Please try our anti-corrosive carbide which has sufficient successful results for a long time.

For belt cleaner or high pressure plant parts which are used under high corrosive environment.

In addition to high wear resistance and anti-corrosiveness, carbide products which is required to be no magnetism for molding or cutting magnetic materials.

Anti-Corrosive Non Magnetic Carbide M23S	Anti-Corrosive Carbide M3
<p>Characteristic : Carbide grade with WC-Ni-Cr which shows excellent anti-corrosiveness and no magnetism</p> <p>Application : Belt cleaner, Waste water treatment equipment parts, Die & mold for the magnetic powdery molding</p>	<p>Characteristic : Carbide grade with WC-Co-Ni-Cr which shows excellent anti-corrosiveness with high hardness and T.R.S.</p> <p>Application : Belt cleaner, Plant parts used under high corrosive environment with high pressure Pump parts for sea water</p>

■ Properties of M23S and M3

Corrosion-resistance expresses the elution weight of the cemented carbide in the acid solution

Type	Grade	Property			Corrosive resistance (Weight reduction by corrosion g/m ² Hr)		
		S.G.	Hardness (HRA)	T.R.S. (GPa)	5%HCl 25°C24Hr	36%HCl 50°C8Hr	10%HNO ₃ 25°C24Hr
Anti-corrosive nonmagnetic carbide	M23S	14.8	90.3	3.1	0.15	0.49	0.07
Anti-corrosive carbide	M3	14.3	92.2	2.5	0.30	1.97	16.5
Ordinal Carbide for Comparison	G5	14.3	89.0	3.3	0.17	3.5	37.1

Anti corrosiveness



Anti-corrosive carbide

Non magnetism



Nonmagnetic carbide

High Wear Resistant Carbide Blanks (Binder-less Carbide)

It is necessary to reduce the content of Co which is binder metal in addition to the miniaturization of the grain size of WC in order to improve the hardness of the alloy. We succeeded in the development of the carbide grade which largely improved the hardness by reducing Co content of the binder metal to the maximum while using WC of the ultra micro fine grain for a main ingredient, and maintaining necessary carbide strength. It is mainly used for molds for glass lens and water blast nozzles.



■ Application


Water jet nozzle / Mold for glass lens / Sliding parts

■ Applicable Grade


BL005 / BL100

	Co content (wt%)	Hardness HV(GPa)
BL005	0.5	27.0
BL100	0.5	25.3

■ Microstructure

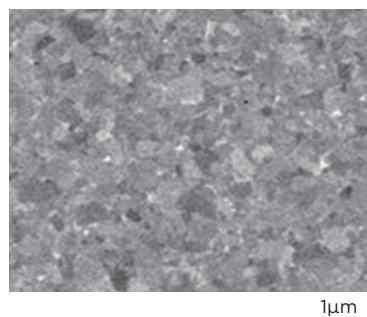

BL005

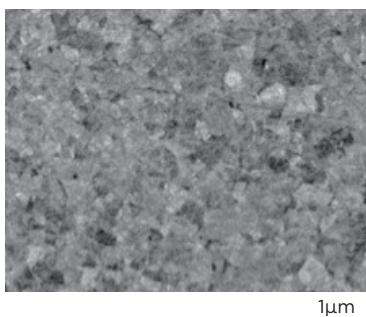

BL100


Carbide Saw Tip Blanks

■ Application

Metal cutting
Wood cutting
Particle board cutting





■ Applicable Grade

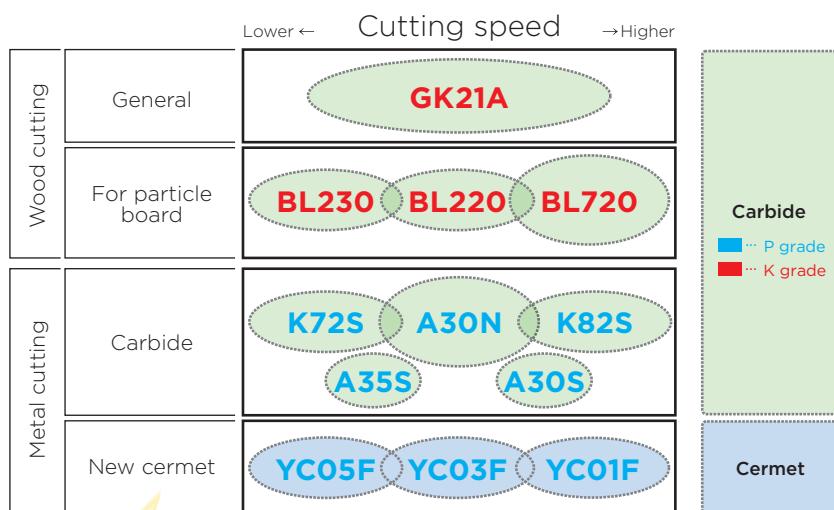

New cermet

Microstructure and physical properties are remarkably improved

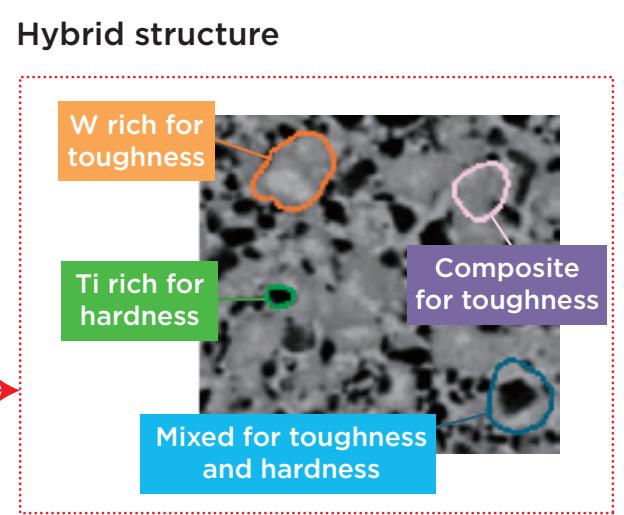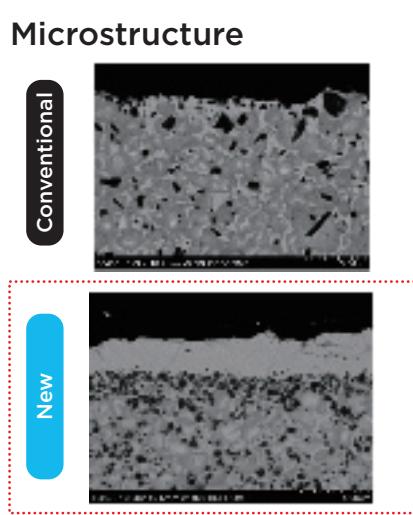


1. Thick binder layer → High stability of brazing
2. Hybrid structure → Improvement of physical properties


Property of Saw Tip Carbide

Classification	ISO code	Grade	S.G.	Grain size	Binder Content	Hardness				T.R.S.	Fracture toughness K _{1c}	Young's modulus	Poisson's Ratio	Thermal conductivity (RT)	Coefcient of Thermal Expansion 0~400°C
			(μm)	(wt%)	HRA	Hv(GPa)	Hv(GPa) @600°C	Hv(GPa) @800°C	(GPa)	(MPam ^{1/2})	(GPa)	v	(W/(m·K))	(x10 ⁻⁶ /K)	
P grade carbide	P20	K82S	12.1	3.4	9.0	91.7	16.1	8.9	5.7	2.1	—	510	0.22	35	6.2
	P30	A30N	11.6	3.4	11.5	91.0	14.9	8.3	5.2	2.4	9.1	520	0.22	31	6.5
	P30	A30S	11.8	3.4	11.0	91.0	14.8			2.5	8.8				
	P40	K72S	12.4	3.6	12.0	90.0	13.9	7.9	4.6	2.6	10.5	510	0.22	44	6.1
	P40	A35S	12.7	3.9	11.5	90.4	14.4			2.4	9.5				
Cermet	P20	YC01F	7.4	—	15.0	92.4	15.8			2.3	6.5	440	0.22	16	8.0
	P30	KA30	7.2	—	15.5	92.1	14.5	8.9	5.9	1.8	8.0	430	0.22	12	7.8
	P30	YC03F	7.5	—	19.0	91.6	14.5	8.7	5.5	2.2	7.5	420	0.23	15	8.1
	P40	YC05F	7.3	—	21.5	91.1	14.5	8.5	5.0	2.5	8.0	420	0.23	16	8.3
K grade carbide	—	GK21A	14.6	2.4	8.0	90.5	14.3	8.5	5.1	3.1	9.7	610	0.22		5.2
High wear resistance	—	BL720	15.3	1.4	2.0	93.4	19.4	13.6	9.9	2.9	5.2	690	0.20	92	4.5
	—	BL220	15.4	2.0	2.0	92.8	18.1	14.0	10.0	2.9	5.4	690	0.20	99	4.5
	—	BL230	15.3	2.0	3.0	92.0	16.8	12.0	7.8	2.5	6.0	670	0.21	122	4.6


By indentation method

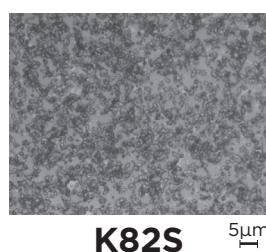


K82S 5μm

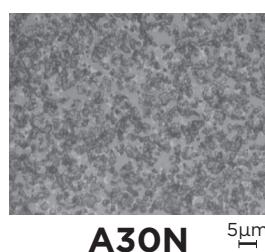


A30N 5μm

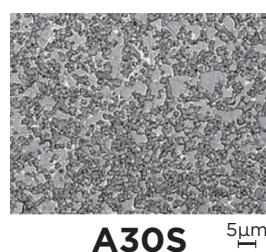


A30S 5μm

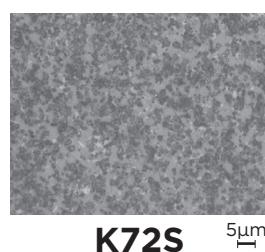


K72S 5μm

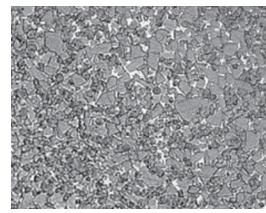


A35S 5μm

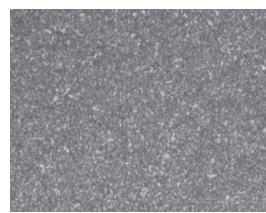


YC01F 5μm

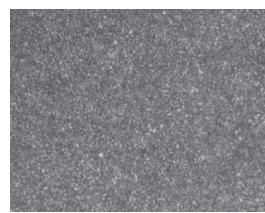

KA30 5μm

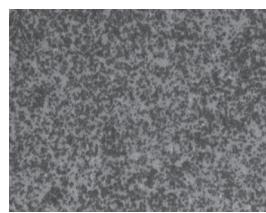


YC03F 5μm

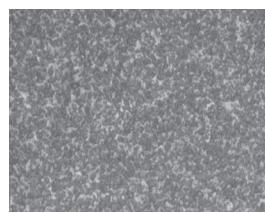

YC05F 5μm




GK21A 5μm

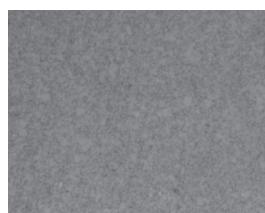

BL720 5μm



BL220 5μm

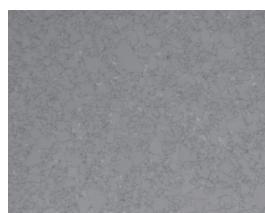


BL230 5μm


Description of Saw Tip Blanks

■ Standard Line-up

SW type

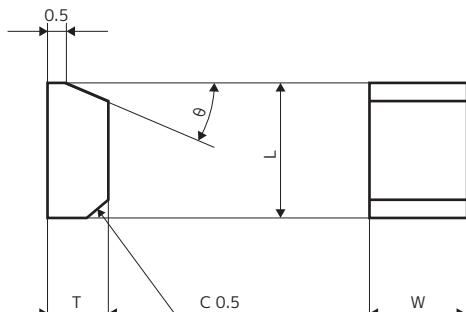

SWP type

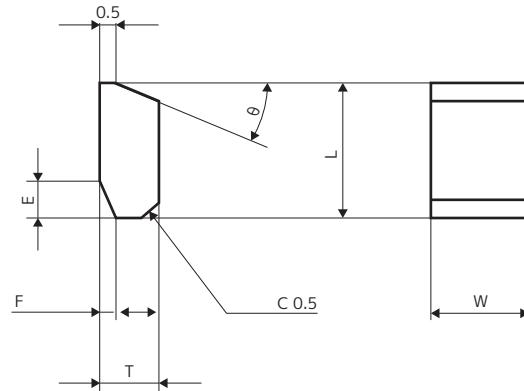


Description	θ
SW L - T - W	0°
SWA L - T - W	10°
SWB L - T - W	15°
SWC L - T - W	20°


Description	θ
SWP L - T - W	0°
SWPA L - T - W	10°
SWPB L - T - W	15°
SWPC L - T - W	20°
SWPD L - T - W	25°

■ With a Chipbreaker


CB type

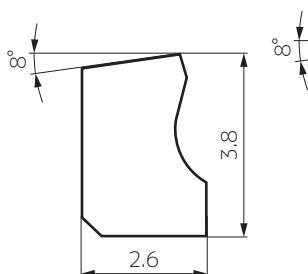


CB38-26-W

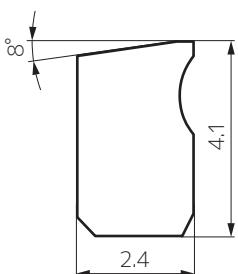


CB41-24-W

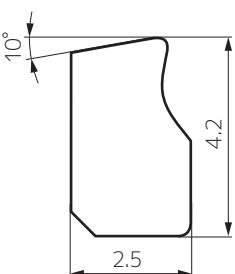


CB42-25-W

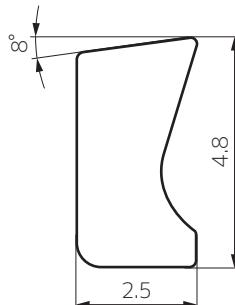


CB48-25-W

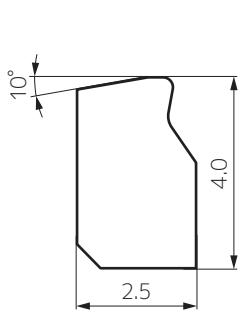

CB40-25-W

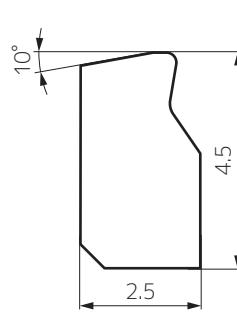

CB45-25-W

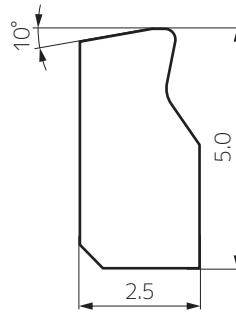

CB50-25-W


(mm)
W : 1.5 to 5.5
 $1.5 \leq W \leq 4.9^{+0.15}_{-0}$
 $4.9 < W \leq 5.5^{+0.2}_{-0}$

Available Dimensions for Saw Tip Blanks

■ SW type ($\theta=0^\circ$)

No.	Description	Carbide grade				Cermet & Fine grain grade			
		L		T		L		T	
1	SW 52 - 10 - W	5.20	+0.3 -0.0	1.00	+0.2 -0.0	5.01	+0.3 -0.0	0.96	+0.2 -0.0
2	SW 60 - 18 - W	6.00		1.80		5.78		1.73	
3	SW 65 - 15 - W	6.50		1.50		6.26		1.44	
4	SW 65 - 20 - W	6.50		2.00		6.26		1.92	
5	SW 65 - 25 - W	6.50		2.50		6.26		2.40	
6	SW 70 - 20 - W	7.00		2.00		6.74		1.92	
7	SW 75 - 25 - W	7.50		2.50		7.23		2.40	
8	SW 80 - 25 - W	8.00		2.50		8.00		2.50	
9	SW 100 - 30 - W	10.00		3.00		9.63		2.88	
10	SW 50 - 20 - W	5.00		2.00		5.00		2.00	
11	SW 60 - 20 - W	6.15	±0.1	2.05	±0.1	6.00	±0.1	2.00	±0.1
12	SW 60 - 30 - W	6.00		3.00		5.78		2.89	
13	SW 70 - 35 - W	7.00		3.50		6.74		3.37	
14	SW 70 - 50 - W	7.00		5.00		6.83		4.88	
15	SW 80 - 30 - W	8.00		3.00		8.00		3.00	
16	SW 90 - 50 - W	9.00		5.00		8.78		4.88	
17	SW 105 - 30 - W	10.50		3.00		10.50		3.00	
18	SW 110 - 50 - W	11.00		5.00		10.73		4.88	
19	SW 130 - 40 - W	13.00		4.00		12.68		3.90	
20	SW 130 - 50 - W	13.00		5.00		12.68		4.88	
21	SW 155 - 40 - W	15.50		4.00		15.12		3.90	
22	SW 155 - 50 - W	15.50		5.00		15.50		5.00	
23	SW 70 - 25 - W	7.18	±0.15	2.56	±0.1	7.00	±0.15	2.50	±0.1
24	SW 70 - 30 - W	7.00		3.00		6.74		2.89	
25	SW 105 - 35 - W	10.76	±0.2	3.59	±0.1	10.50	±0.2	3.50	±0.1
26	SW 180 - 50 - W	18.00		5.00		17.56		4.88	
27	SW 200 - 50 - W	20.00		5.00		19.51		4.88	

SW type

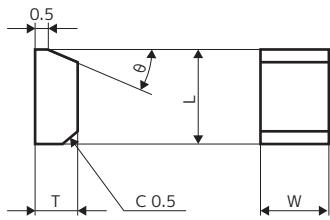

Description	θ
SW L - T - W	0°
SWA L - T - W	10°
SWB L - T - W	15°
SWC L - T - W	20°

W : 1.5 to 5.5

1.5 ≤ W ≤ 4.9^{+0.15}₋₀

4.9 < W ≤ 5.5^{+0.2}₋₀

(mm)

Available Dimensions for Saw Tip Blanks

■ SWA type ($\theta=10^\circ$)

No.	Description	Carbide grade				Cermet & Fine grain grade			
		L		T		L		T	
1	SWA 50 - 15 - W	5.00	+0.3 -0.0	1.50	+0.2 -0.0	4.81	+0.3 -0.0	1.44	+0.2 -0.0

■ SWB type ($\theta=15^\circ$)

No.	Description	Carbide grade				Cermet & Fine grain grade			
		L		T		L		T	
1	SWB 45 - 18 - W	4.50	+0.3 -0.0	1.80	+0.2 -0.0	4.50	+0.3 -0.0	1.80	+0.2 -0.0
2	SWB 50 - 16 - W	5.19		1.66		5.00		1.60	
3	SWB 50 - 18 - W	5.13		1.85		5.00		1.80	
4	SWB 60 - 18 - W	6.00		1.80		6.00		1.80	
5	SWB 60 - 30 - W	6.16		3.08		6.00		3.00	
6	SWB 65 - 20 - W	6.50		2.00		6.50		2.00	
7	SWB 70 - 30 - W	7.18		3.08		7.00		3.00	
8	SWB 80 - 30 - W	8.21		3.08		8.00		3.00	
9	SWB 90 - 30 - W	9.00		3.00		8.67		2.89	

■ SWC type ($\theta=20^\circ$)

No.	Description	Carbide grade				Cermet & Fine grain grade			
		L		T		L		T	
1	SWC 50 - 15 - W	5.00	+0.3 -0.0	1.50	+0.2 -0.0	5.00	+0.3 -0.0	1.50	+0.2 -0.0
2	SWC 55 - 20 - W	5.50		2.00		5.30		1.92	
3	SWC 60 - 17 - W	6.00		1.70		6.00		1.70	
4	SWC 60 - 20 - W	6.00		2.00		6.00		2.00	
5	SWC 70 - 22 - W	7.00		2.20		7.00		2.20	
6	SWC 70 - 25 - W	7.00		2.50		7.00		2.50	
7	SWC 70 - 30 - W	7.00		3.00		6.74		2.89	
8	SWC 75 - 25 - W	7.50		2.50		7.23		2.40	
9	SWC 80 - 20 - W	8.00		2.00		7.71		1.92	
10	SWC 80 - 25 - W	8.00		2.50		7.71		2.40	
11	SWC 90 - 30 - W	9.00		3.00		8.67		2.88	
12	SWC 110 - 30 - W	11.00		3.00		10.59		2.88	

Available Dimensions for Saw Tip Blanks

■ SWP type ($\theta=0^\circ$)

No.	Description	Carbide grade			Cermet & Fine grain grade			E		F	
		L	T	L	T						
1	SWP 90 - 30 - W	9.34	± 0.15	3.11	± 0.1	9.00	± 0.15	3.00	± 0.1	1.5	± 0.15
2	SWP 100 - 35 - W	10.00	± 0.1	3.50		10.00	± 0.1	3.50		2.0	
3	SWP 130 - 35 - W	13.49	± 0.2	3.63		13.00	± 0.2	3.50		2.0	


■ SWPA type ($\theta=10^\circ$)

No.	Description	Carbide grade			Cermet & Fine grain grade			E		F	
		L	T	L	T						
1	SWPA 32 - 18 - W	3.20	$+0.3$ -0.0	1.80	$+0.2$ -0.0	3.08	$+0.3$ -0.0	1.73	$+0.2$ -0.0	0.30	± 0.15
2	SWPA 58 - 24 - W	5.94		2.46		5.80		2.40		1.00	
3	SWPA 65 - 20 - W	6.50		2.00		6.26		1.92		2.00	
4	SWPA 70 - 22 - W	7.00		2.20		7.00		2.20		2.00	
5	SWPA 75 - 24 - W	7.88		2.52		7.50		2.40		2.00	
6	SWPA 77 - 27 - W	8.09		2.84		7.70		2.70		2.00	

■ SWPB type ($\theta=15^\circ$)

No.	Description	Carbide grade			Cermet & Fine grain grade			E		F	
		L	T	L	T						
1	SWPB 40 - 20 - W	4.15	$+0.3$ -0.0	2.08	$+0.2$ -0.0	4.00	$+0.3$ -0.0	2.00	$+0.2$ -0.0	1.00	± 0.15
2	SWPB 45 - 15 - W	4.50		1.50		4.50		1.50		1.00	
3	SWPB 50 - 15 - W	5.00		1.50		5.00		1.50		1.00	
4	SWPB 50 - 17 - W	5.00		1.70		4.94		1.68		1.00	
5	SWPB 55 - 15 - W	5.50		1.50		5.30		1.45		1.00	
6	SWPB 55 - 18 - W	5.50		1.80		5.50		1.80		1.00	
7	SWPB 55 - 25 - W	5.50		2.50		5.37		2.44		1.00	
8	SWPB 59 - 19 - W	5.90		1.90		5.69		1.83		1.00	± 0.15
9	SWPB 60 - 18 - W	6.00		1.80		6.00		1.80		1.00	
10	SWPB 60 - 20 - W	6.00		2.00		6.00		2.00		1.00	
11	SWPB 65 - 20 - W	6.50		2.00		6.50		2.00		1.00	
12	SWPB 70 - 20 - W	7.00		2.00		7.00		2.00		1.00	
13	SWPB 70 - 23 - W	7.00		2.30		7.00		2.30		1.00	
14	SWPB 70 - 25 - W	7.00		2.50		6.74		2.41		1.00	
15	SWPB 80 - 25 - W	8.00		2.50		8.00		2.50		1.00	
16	SWPB 85 - 25 - W	8.50		2.50		8.19		2.41		1.00	

SWP type

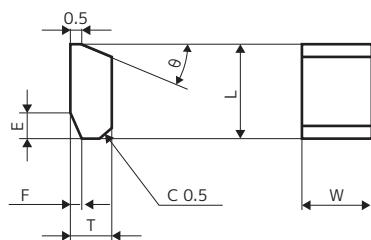

Description	θ
SWP L - T - W	0°
SWPA L - T - W	10°
SWPB L - T - W	15°
SWPC L - T - W	20°
SWPD L - T - W	25°

W : 1.5 to 5.5

(mm)
 $1.5 \leq W \leq 4.9^{+0.15}_{-0}$
 $4.9 < W \leq 5.5^{+0.2}_{-0}$

Available Dimensions for Saw Tip Blanks

■ SWPC type ($\theta=20^\circ$)

No.	Description	Carbide grade		Cermet & Fine grain grade		E		F	
		L	T	L	T				
1	SWPC 40 - 18 - W	4.00	+0.3 -0.0	1.80	+0.2 -0.0	4.00	1.80	0.70	±0.15
2	SWPC 50 - 15 - W	5.00		1.50		5.00	1.50	1.50	
3	SWPC 55 - 15 - W	5.50		1.50		5.30	1.45	1.50	
4	SWPC 55 - 16 - W	5.50		1.60		5.50	1.60	1.50	
5	SWPC 55 - 18 - W	5.50		1.80		5.50	1.80	1.50	
6	SWPC 55 - 21 - W	5.71		2.18		5.50	2.10	1.50	
7	SWPC 60 - 15 - W	6.00		1.50		5.78	1.44	2.00	
8	SWPC 60 - 18 - W	6.00		1.80		6.00	1.80	1.50	
9	SWPC 60 - 20 - W	6.00		2.00		6.00	2.00	1.50	
10	SWPC 60 - 20 - W	6.00		2.00		6.00	2.00	2.00	1.00
11	SWPC 65 - 20 - W	6.50		2.00		6.50	2.00	2.00	0.50
12	SWPC 65 - 20 - W	6.50		2.00		6.26	1.92	2.00	1.00
13	SWPC 65 - 23 - W	6.50		2.30		6.26	2.21	2.00	0.80
14	SWPC 65 - 25 - W	6.50		2.50		6.26	2.40	2.00	1.30
15	SWPC 70 - 20 - W	7.00		2.00		6.74	1.92	2.00	1.00
16	SWPC 70 - 23 - W	7.00		2.30		7.00	2.30	2.00	0.50
17	SWPC 77 - 25 - W	7.70		2.50		7.70	2.50	2.50	1.25
18	SWPC 80 - 23 - W	8.00		2.30		8.00	2.30	2.00	0.50
19	SWPC 80 - 25 - W	8.00		2.50		7.71	2.41	2.00	1.30
20	SWPC 85 - 25 - W	8.50		2.50		8.19	2.40	2.00	1.30
21	SWPC 90 - 25 - W	9.00		2.50		8.67	2.40	2.00	1.30
22	SWPC 90 - 27 - W	9.00		2.70		8.67	2.60	3.00	1.30
23	SWPC 95 - 27 - W	9.86		2.80		9.50	2.70	2.50	0.70
24	SWPC 100 - 25 - W	10.00		2.50		10.00	2.50	3.00	1.30
25	SWPC 100 - 27 - W	10.37		2.80		10.00	2.70	2.50	0.70
26	SWPC 105 - 30 - W	10.50		3.00		10.11	2.88	3.50	1.50
27	SWPC 110 - 35 - W	11.00		3.50		10.59	3.37	3.00	1.50
28	SWPC 120 - 30 - W	12.00		3.00		11.56	2.89	2.00	1.00
29	SWPC 140 - 30 - W	14.00		3.00		13.49	2.88	4.00	1.30

■ SWPD type ($\theta=25^\circ$)

No.	Description	Carbide grade		Cermet & Fine grain grade		E		F	
		L	T	L	T				
1	SWPD 45 - 15 - W	4.50	+0.3 -0.0	1.50	+0.2 -0.0	4.34	1.46	1.00	±0.15
2	SWPD 60 - 15 - W	6.00		1.50		5.78	1.44	1.00	
3	SWPD 60 - 18 - W	6.00		1.80		5.78	1.73	1.00	
4	SWPD 60 - 20 - W	6.00		2.00		5.78	1.92	1.00	
5	SWPD 62 - 19 - W	6.44		1.97		6.20	1.90	1.00	
6	SWPD 65 - 20 - W	6.50		2.00		6.50	2.00	1.00	
7	SWPD 70 - 20 - W	7.00		2.00		6.74	1.92	1.00	
8	SWPD 70 - 23 - W	7.00		2.30		6.74	2.21	1.00	

MEMO

A large grid of dotted lines, intended for handwritten notes or memos. The grid consists of approximately 20 horizontal rows and 30 vertical columns, creating a pattern of small squares across the page.

MEMO

A large grid of small, faint gray dots on a white background, intended for writing notes or drawing diagrams.



● Very hot or lengthy chips may be discharged while the machine is in operation. Therefore, machine guards, safety goggles or other protective covers must be used. Fire safety precautions must also be considered.

< SAFETY NOTES >

- Please handle with care as this product has sharp edges.
- Improper cutting conditions or mis-handling of the tool may result in breakages or projectiles. Therefore, please use the tool within its recommended conditions.

- When using non-water soluble cutting oil, precautions against fire must be taken and please ensure that a fire extinguisher is placed near the machine.



Sumitomo Electric Industries, Ltd.

Hardmetal Division

Global Marketing Department : 1-1-1, Koyakita, Itami, Hyogo 664-0016, Japan

<https://www.sumitool.com/global>